

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 862.C1992

First Named Inventor or Application Identifier

Kentaro MATSUMOTO

Express Mail Label No.

Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages 90

3. ☒ Drawing(s) (35 USC 113) Total Sheets 32

4. ☒ Patent Application Bibliographic  
Data Sheet Total Sheets 2

☐ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☐ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)

[Note Box 6 below]

d. ☐ DELETION OF INVENTOR(S)

Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b)

☐ Incorporation By Reference (useable if Box 5c is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 5c, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein. The incorporation can only be  
relied upon when a portion has been inadvertently omitted from the  
submitted application parts.

7. ☐ Microfiche Computer Program (Appendix)

8. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))

10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)

11. ☐ English Translation Document (if applicable)

12. ☐ Information Disclosure  
Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations

13. ☐ Preliminary Amendment

14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

15. ☐ Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired

16. ☐ Certified Copy of Priority Document(s)  
(If foreign priority is claimed)

17. ☐ Other: \_\_\_\_\_

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/  
Prior application information: Examiner \_\_\_\_\_ Group/Art Unit: \_\_\_\_\_

## 19. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		59-20 =	39	X \$ 18.00 =	\$702.00
INDEPENDENT CLAIMS (37 CFR 1.16(p))		9-3 =	6	X \$ 78.00 =	\$468.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$690.00
				Total of above Calculations =	\$1,860.00
				Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).	0
				TOTAL =	\$1,860.00

20. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


21. ☒ A check in the amount of \$ 1,860.00 to cover the filing fee is enclosed.

22. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

23. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

NAME	Joseph W. Ragusa (Reg. No. 38,586)
SIGNATURE	
DATE	August 29, 2000

# INVENTOR INFORMATION

Inventor One Given Name:: Kentaro  
Family Name:: MATSUMOTO  
Postal Address Line One:: 19-2, Hikawadai 1-chome,  
City:: Higashikurume-shi  
State or Province:: Tokyo  
Country:: JAPAN  
Inventor Two Given Name:: Kunihiro  
Family Name:: YAMAMOTO  
Postal Address Line One:: 36-30-505, Tsurumichuo 4-chome,  
Postal Address Line Two:: Tsurumi-ku  
City:: Yokohama-shi  
State or Province:: Kanagawa-ken  
Country:: JAPAN  
Inventor Three Given Name:: Kiyoshi  
Family Name:: KUSAMA  
Postal Address Line One:: 12-28-202, Miyauchi 4-chome,  
Postal Address Line Two:: Nakahara-ku  
City:: Kawasaki-shi  
State or Province:: Kanagawa-ken  
Country:: JAPAN  
Inventor Four Given Name:: Takashi  
Family Name:: HANAMOTO  
Postal Address Line One:: c/o Canon Daini Shinjo Ryo,  
Postal Address Line Two:: 773, Chitose, Takatsu-ku  
City:: Kawasaki-shi  
State or Province:: Kanagawa-ken  
Country:: JAPAN

## CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514  
Fax:: (212) 218-2200

## APPLICATION INFORMATION

Title Line One:: RECORDING APPARATUS AND METHOD AND STORAGE  
Title Line Two:: MEDIUM  
Total Drawing Sheets:: 32  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: 862.C1992  
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-245186

Filing Date:: 08-31-1999

Country:: JAPAN

Priority Claimed:: Yes

Foreign Application Two:: 2000-225894

Filing Date:: 07-26-2000

Country:: JAPAN

Priority Claimed:: Yes

Foreign Application Three:: 2000-225895

Filing Date:: 07-26-2000

Country:: JAPAN

Priority Claimed:: Yes

11-245186  
08-31-1999  
JAPAN  
Yes  
2000-225894  
07-26-2000  
JAPAN  
Yes  
2000-225895  
07-26-2000  
JAPAN  
Yes

# TITLE OF THE INVENTION

## RECORDING APPARATUS AND METHOD AND STORAGE MEDIUM

### 5 FIELD OF THE INVENTION

The present invention relates to a recording apparatus and method and storage medium and, more particularly, to a recording apparatus and method for attaching meta-data as information related to binary data to, e.g., binary data such as still image data, moving image data, or voice data obtained using a digital still camera or digital video camera.

### BACKGROUND OF THE INVENTION

15 Along with the spread of digital still cameras or digital video cameras, the quantity of binary data such as still image data, moving image data, and voice data to be processed in general homes is greatly increasing. To use the binary data, a certain search method or management method is required. For this purpose, a method has been used in which meta-data as information related to the contents, characteristics, and meanings of binary data, e.g., a person's name, event title, date, and keyword described in the binary data are attached to the binary data, 25 and the binary data is searched for or managed using this attached meta-data.

When meta-data representing personal information is attached to each binary data, the person who owns the binary data can be discriminated. Hence, even when a plurality of persons share and use one server, the meta-data can be used for personal management of binary data or privacy protection.

In many cases, however, no meta-data is attached to binary data sensed with a digital still camera or digital video camera, and the meta-data method is not effectively used. One reason for this is that even when an application for processing meta-data is used, generation of meta-data and attachment of it to binary data are time-consuming. For example, to attach appropriate meta-data to binary data, the meta-data must be generated and attached while confirming the contents of the binary data. Even when the same meta-data can be repeatedly used for binary data generated under almost the same conditions, the meta-data must be repeatedly generated and attached in units of binary data. In addition, often no meta-data is attached to binary data because in loading binary data in a server, generation and attachment of meta-data to the binary data are time-consuming.

The present invention has been made to solve the above problem, and has as its first object to provide a first recording apparatus and method capable of easily generating meta-data as information related to binary data such as

still image data, moving image data, or voice data,  
generating binary data such as image data and voice data,  
and repeatedly attaching the same meta-data generated to  
a plurality of generated binary data to easily generate  
5 binary data having meta-data.

It is the second object of the present invention to  
provide a second recording apparatus and method capable of  
easily generating meta-data, using binary data loaded from  
a storage medium or the like, and repeatedly attaching the  
10 same meta-data generated to a plurality of loaded binary  
data to easily generate binary data having meta-data.

It is the third object of the present invention to  
provide a third recording apparatus and method capable of  
using meta-data loaded from a storage medium or the like,  
15 generating binary data, and repeatedly attaching the same  
meta-data loaded to a plurality of generated binary data  
to easily generate binary data having meta-data. The  
present invention also provides a meta-data generation  
apparatus and method for easily generating meta-data and  
20 storing it in a storage medium.

#### SUMMARY OF THE INVENTION

In order to achieve the above object, the first  
recording apparatus of the present invention has the  
25 following feature. There is provided a recording  
apparatus for attaching, to binary data, meta-data as

information related to the binary data, comprising  
meta-data generation means for generating the meta-data,  
binary data generation means for generating the binary data  
to which the meta-data is to be attached, and meta-data  
5 attaching means for attaching the same meta-data to a  
plurality of binary data generated by the binary data  
generation means to generate binary data having meta-data.

In order to achieve the above object, the second  
recording apparatus of the present invention has the  
10 following feature. There is provided a recording  
apparatus for attaching, to binary data, meta-data as  
information related to the binary data, comprising  
meta-data generation means for generating the meta-data,  
binary data loading means for loading the binary data to  
15 which the meta-data is to be attached from a first  
detachable storage medium or external device, and meta-data  
attaching means for attaching the same meta-data to a  
plurality of binary data loaded by the binary data loading  
means to generate binary data having meta-data.

In order to achieve the above object, the third  
recording apparatus of the present invention has the  
following feature. There is provided a recording  
apparatus for attaching, to binary data, meta-data as  
information related to the binary data, comprising  
25 meta-data loading means for loading the meta-data from a  
first detachable storage medium or external device, binary



data loading means for loading the binary data from the first detachable storage medium or external device, and meta-data attaching means for attaching the same meta-data loaded by the meta-data loading means to a plurality of binary data generated by the binary data generation means to generate binary data having meta-data.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

Fig. 1 is a block diagram showing a system configuration of a recording apparatus according to the first embodiment;

Fig. 2A is a view showing the outer appearance of the recording apparatus according to the first embodiment;

Fig. 2B is the rear view of the rear surface of the recording apparatus according to the first embodiment;

Fig. 3 is a view showing attachment of a memory card

in the first embodiment;

Fig. 4 is a view showing a meta-data registration GUI window;

Fig. 5 is a flow chart of meta-data pre-registration;

5 Fig. 6 is a flow chart of meta-data file generation;

Fig. 7 is a flow chart of storage of generated meta-data in the first embodiment;

Fig. 8 is a view showing a meta-data file;

10 Fig. 9 is a flow chart showing generation and storage of image data having meta-data in the first embodiment;

Fig. 10A shows the file structure of first image data having meta-data;

Fig. 10B shows the file structure of second image data having meta-data;

15 Fig. 11 is a view for explaining the process of generating the first image data having meta-data;

Fig. 12 is a view for explaining the process of generating the second image data having meta-data;

Fig. 13 is a view showing a meta-data file;

20 Fig. 14 is a block diagram showing a system configuration of a recording apparatus according to the second embodiment;

Fig. 15A is a view showing the outer appearance of the recording apparatus according to the second embodiment;

25 Fig. 15B is the rear view of the rear surface of the recording apparatus according to the second embodiment;

Fig. 16 is a view showing attachment of a memory card in the second embodiment;

Fig. 17 is a flow chart of storage of generated meta-data in the second embodiment;

5        Fig. 18 is a view for explaining the process of generating image data having meta-data in the second embodiment;

Fig. 19 is a block diagram showing the system configuration of a meta-data generation apparatus  
10 according to the third embodiment;

Fig. 20 is a block diagram showing the system configuration of a first recording apparatus according to the third embodiment;

Fig. 21 is a block diagram showing the functional  
15 arrangement of the meta-data generation apparatus and first recording apparatus according to the third embodiment;

Fig. 22 shows the structure of image data having meta-data, in which meta-data is embedded following image data;

20        Fig. 23 is a block diagram showing a system configuration of a second recording apparatus according to the third embodiment;

Fig. 24 is a block diagram showing the function of the meta-data generation apparatus and second recording  
25 apparatus according to the third embodiment;

Fig. 25 is a view showing attachment of a memory card

in the third embodiment;

Fig. 26 is a view for explaining the process of generating image data having meta-data in the third embodiment;

5 Fig. 27A is a view showing the outer appearance of the meta-data generation apparatus according to the third embodiment;

Fig. 27B is the rear view of the rear surface of the meta-data generation apparatus according to the third  
10 embodiment;

Fig. 28A is a view showing the outer appearance of the recording apparatus according to the third embodiment; and

Fig. 28B is the rear view of the rear surface of the  
15 recording apparatus according to the third embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be described in detail in accordance with the  
20 accompanying drawings.

An embodiment of the present invention will be described below in detail with reference to the accompanying drawings.

The embodiments will be described below mainly using  
25 still image data as an example of binary data such as still image data, moving image data, or voice image data. However,

the present invention is not limited to the illustrated embodiments.

[First Embodiment]

As a recording apparatus of the first embodiment, a  
5 recording apparatus 200 capable of generating binary data  
by image sensing or the like, generating meta-data as  
information related to the binary data, and repeatedly  
attaching the same meta-data generated to generated binary  
data to easily generate and output a plurality of binary  
10 data each having meta-data will be described. In the  
following description, still image data is used as binary  
data.

[Hardware Configuration of Recording Apparatus]

Fig. 1 is a block diagram showing the system  
15 configuration of the recording apparatus 200.

A data input/output section 100 inputs/outputs  
binary data or meta-data. As shown in Fig. 3, a memory card  
such as a PC card or PCMCIA card 109 is directly inserted.  
The memory card such as a compact flash 111 or smart medium  
20 113 is inserted via an adapter 110 or card adapter 112.  
Instead of a memory card, other removable storage medium  
(not shown) may be used.

The data input/output section 100 is connected to an  
external device 107 such as a personal computer via an input  
25 terminal such as a USB terminal, SCSI terminal, or parallel  
terminal. In the following description, a USB terminal is

used as an input terminal.

Data (meta-data or binary data) recorded by the external device 107 is directly loaded from the external device 107 to the recording apparatus 200 through the input terminal, or temporarily stored on a memory card 403 and then loaded to the recording apparatus 200 through the memory card 403.

Conversely, data processed by the recording apparatus 200 is directly written in the external device 107 through the input terminal, or temporarily stored on the memory card 403 and then written in the external device 107 through the memory card 403. The data processed by the recording apparatus 200 can be written in a storage section 102 different from the memory card 403. The external device 107 and data input/output section 100 can be connected not directly as described above but by use of a wireless channel. In this case, a wireless channel interface corresponding to the external device 107 is exists in the data input/output section 100.

An input section 101 inputs data or an instruction from the user and is comprised of, e.g., operation buttons 206 shown in Fig. 2B. The storage section 102 stores binary data or meta-data and is formed from, e.g., a hard disk, removable medium, or memory card.

A display section 103 displays a GUI or image data and is constructed by, e.g., a liquid crystal panel.

A CPU 104 controls the entire recording apparatus 200. A ROM 105 and RAM 106 provide to the CPU 104 a program, data, and work area necessary for processing by the CPU 104.

Control programs necessary for processing operations shown in the flow charts of Figs. 5, 6, 7, and 9 are stored in the storage section 102 or ROM 105. When the storage section 102 stores a control program, it is temporarily loaded to the RAM 106 and then executed.

A CCD 108 converts an optical image obtained by image sensing into an electrical signal, thereby generating image data. To convert voice into an electrical signal to generate voice data, a microphone (not shown) can be used in place of the CCD 108.

When a CCD (not shown) for generating moving image data is used in place of the CCD 108 for generating still image data, a tape or removable medium (not shown) for recording the moving image data can be used. Although the system configuration includes various components in addition to the above components, a detailed description thereof will be omitted because they are not main components of the present invention.

Figs. 2A and 2B are views showing the outer appearance of the recording apparatus 200. The front surface shown in Fig. 2A has an image sensing lens 201, and the top surface has an image sensing button 202 as a member of the input section 101. The side surface shown in Fig. 2A

has a memory card slot 203 as a member of the data input/output section 100, so data in a storage medium, i.e., memory card 403 inserted into the slot can be loaded into the recording apparatus 200 through the memory card 403.

5 The side surface also has an input terminal (USB terminal 204) as another member of the data input/output section 100, which can be connected to an external device 107 and also to the memory card 403 inserted into the external device 107, thereby enabling exchange of meta-data or image data.

10 The rear surface shown in Fig. 2B has a liquid crystal panel 205, so sensed image data can be displayed, or a GUI for meta-data attachment can be displayed.

The rear surface has operation buttons 206 as members of the input section 101, which are used for adjustment in image sensing, or to input meta-data or attach meta-data to image data. The operation buttons 206 are used to select, change, or add input data, or input new data, as shown in Fig. 4.

20 In the example shown in Fig. 2A, only the USB terminal 204 is shown as an input terminal. Other input terminal such as a parallel terminal or SCSI terminal can be used as far as it can transmit/receive data.

The external device 107 and data input/output section 100 may be connected not directly as described above but using a wireless channel. In this case, a wireless channel interface corresponding to the external device 107 is



included in the data input/output section 100.

#### [Input of Meta-Data]

A series of operations of generating information of still image data as meta-data and storing it on the memory card 403 or the like using the recording apparatus 200 will be described, next, in detail. First, an input method for registering meta-data will be described with reference to Fig. 4.

Fig. 4 is a view showing a GUI window used to register meta-data.

The GUI window has display/input sections 301 to 304 for displaying meta-data registered in advance or displaying newly generated meta-data, buttons 3011, 3021, 3031, and 3041 used to display lists of registered meta-data, "add" buttons 305, 307, and 308 for adding information input using the operation buttons 206 when no appropriate information is present in the displayed list and the user wants to add new information, a "change" button 306 for changing the date and time of image sensing of still image data input using the operation buttons 206 and an "OK" button 309 for determining meta-data to be registered after the end of selection, addition, and change of meta-data to be registered.

A method of registering detailed items "Who?", "When?", "Where?", and "What?" as meta-data information of still image data using the GUI window shown in Fig. 4 will

be described next.

Assume that "Who?" is "Taro", "When?" is "1999-6-14",  
"Where?" is "athletic park", and "What?" is "athletic  
meeting", and these meta-data are selected from lists of  
5 meta-data registered in advance or newly input and  
registered as meta-data.

"Who?" will be described first. When the button 3011  
having an inverted triangular shape at the right end of the  
display/input section 301 is pressed, the first contents  
10 of the list registered for the button 3011 are displayed  
on the display/input section 301. When the button 3011  
having an inverted triangular shape is pressed twice, the  
second contents of the list registered in advance for the  
button 3011 are displayed on the display/input section 301.  
15 Thus, the button 3011 is repeatedly pressed to search for  
"Taro" registered in the list in advance. If "Taro" is not  
present in the registered list, "Taro" is input using the  
operation buttons 206, and the "add" button 305 is pressed  
to add "Taro" to the item "Who?".

20 "When?" will be described next. Upon activating the  
GUI window, the current date and time are displayed on the  
display/input section 302. If the date is different from  
the date of image sensing, the date of image sensing or  
"1999-06-14" is input using the operation buttons 206, and  
25 then the "change" button 306 is pressed to add "1999-06-14"  
to the item "When?".

"Where?" will be described next. When the button 3031 having an inverted triangular shape at the right end of the display/input section 303 is pressed, the first contents of the list registered for the button 3031 in advance are displayed on the display/input section 303. When the button 3031 having an inverted triangular shape is pressed twice, the second contents of the list registered in advance for the button 3031 are displayed on the display/input section 303. Thus, the button 3031 is repeatedly pressed to search for "athletic park" registered in the list in advance. If "athletic park" is not present in the registered list, "athletic park" is input using the operation buttons 206, and the "add" button 307 is pressed to add "athletic park" to the item "Where?".

"What?" will be described next. When the button 3041 having an inverted triangular shape at the right end of the display/input section 304 is pressed, the first contents of the list registered for the button 3041 in advance are displayed on the display/input section 304. When the button 3041 having an inverted triangular shape is pressed twice, the second contents of the list registered in advance for the button 3041 are displayed on the display/input section 304. Thus, the button 3041 is repeatedly pressed to search for "athletic meeting" registered in the list in advance. If "athletic meeting" is not present in the registered list, "athletic meeting" is input using the

operation buttons 206, and the "add" button 308 is pressed to add "athletic meeting" to the item "What?".

After all the items "Who?", "When?", "Where?", and "What?" are input, the "OK" button 309 is pressed to register the set items, thereby ending meta-data registration.

As meta-data registration, only the method of displaying, selecting, and inputting the items "Who?", "When?", "Where?", and "What?" has been described above.

10 A method of displaying, selecting, and inputting another item on the window can be added.

[Generation and Storage of Meta-Data]

A series of operations for generating meta-data and storing it on the memory card 403 or in the storage section

15 102 using the recording apparatus 200 will be described next in detail with reference to Figs. 5 to 8.

Fig. 5 is a flow chart showing processing of generating meta-data and storing the generated meta-data on the memory card 403 or in the storage section 102 by the

20 recording apparatus 200.

First, in step S401, list files "Who?", "When?", "Where?", and "What?" which are to be registered for the buttons 3011, 3021, 3031, and 3041 and displayed on the display/input sections 301 to 304 are loaded to the RAM 106.

25 In step S402, the loaded lists are displayed on the GUI window shown in Fig. 4.

In step S403, the user inputs meta-data "Who?", "When?", "Where?", and "What?" to the display/input sections 301 to 304, respectively. The input method has already been described above in detail with reference to 5 Fig. 4, thus, the detailed description thereof will be omitted.

In step S404, when the "OK" button 309 shown in Fig. 4 is pressed, a meta-data file is generated on the basis of the input meta-data using a data description language, i.e., 10 a markup language such as the XML shown in Fig. 8.

In the example shown in Fig. 8, the input meta-data are registered as a meta-data file with a file name: "CardInfo.xml". To describe the meta-data, a markup language XML is used. Instead of the XML, the SGML or HTML 15 can be used.

In step S405, the generated meta-data file is written on the memory card 403 or in the storage section 102 through the data input/output section 100 and stored with the file name: "CardInfo.xml". Write processing on the memory card 20 403 or in the storage section 102 will be described later in detail with reference to Fig. 7, thus the detailed description thereof will be omitted at this time.

In the above-described example, one meta-data file is generated. However, a plurality of meta-data files may 25 be generated. In this case, a meta-data file can be repeatedly generated to generate a plurality of meta-data

files.

[Generation of Meta-Data File]

Fig. 6 is a flow chart showing meta-data file generation executed by the recording apparatus 200 in step 5 S404 on the basis of the input value of meta-data input by the user in step S403.

First, in step S501, it is checked whether the button 3011, 3021, 3031, or 3041 is pressed. If NO in step S501, processing waits until input is detected. If YES in step 10 S501, the flow advances to step S502. When any one of the buttons 305 to 308 is pressed, the flow advances to step S503. When the button 309 is pressed, the flow advances to step S504.

When step S502 is selected, the contents of a list 15 corresponding to one of the list display buttons 3011, 3021, 3031, and 3041 are displayed, and the flow advances to step S505. When the list file displayed in correspondence with one of the list display buttons 3011, 3021, 3031, and 3041 is selected, the flow advances to step S506. After the 20 selected item is copied to the input area, the flow returns to step S501. When the displayed list file is not selected in step S505, the flow returns to step S501 without any processing.

When step S503 is selected, it is checked whether the 25 "add" button 305, 307, or 308 is pressed or whether the "change" button 306 is pressed. When the "add" button 305,

307, or 308 is pressed, the flow advances to step S507. After the contents of the display/input section, which are added by the user, are added to a corresponding list file, the flow advances to step S508. When the "change" button  
5 306 is pressed, the flow advances to step S508 without meaning processing step 7. In step S508, the date and time in the list file are changed to the contents on the display/input section, and the flow returns to step S501.

When step S504 is selected, and the "OK" button is  
10 pressed, a meta-data file is generated, and the series of operations are ended.

Thus, the meta-data file shown in Fig. 8 is generated.

In the above-described example, the user inputs  
15 meta-data using the operation buttons 206. As another input method, meta-data can be inputted from a remote controller using a G code or inputted by using voice recognition. Alternatively, the recording apparatus 200 can be connected to the external device 107 through the  
20 input terminal of the data input/output section 100, and meta-data can be input using the input section such as a keyboard of the external device 107.

Fig. 8 will be described. To describe meta-data, XML is used. XML (eXtensible Markup Language) is a markup  
25 language used by applications that require functions beyond the current HTML (HyperText Markup Language). XML

developed by the World Wide Web consortium mainly has the following characteristic features.

1. An information provider can freely define new tags and attribute names.
- 5 2. A document can have any complex nested structure.
3. A description of syntax can be optionally embedded in an XML document, and an application can be made to verify the validity of structure using this syntax.

The description by XML shown in Fig. 8 can be written  
10 using a general-purpose text editor program. However, to generate a so-called "wellformed XML" in which, e.g., <PHOTO> and </PHOTO> or <ITEM> and </ITEM> correctly correspond, an XML editor program can be conveniently used. [Write of Meta-Data in Storage Section or on Memory Card]

15 Fig. 7 is a flow chart showing processing of writing the meta-data shown in Fig. 8 in the storage section 102 or on the memory card 403, which is executed in step S405 shown in Fig. 5.

First, in step S601, to execute write processing on  
20 the memory card 403, the memory card 403 such as a PC card is inserted into the data input/output section 100. Alternatively, the recording apparatus 200 may be connected to the external device 107 through the input terminal of the data input/output section 100.

25 After completion of connection, in step S602, the meta-data generated in step S404 are written in the storage



section 102 or on the memory card 403, and processing is ended.

[Processing of Linking Meta-Data to A Plurality of Binary Data]

5           Two processes of linking the above-described generated meta-data to binary data will be described next with reference to Figs. 9 to 12. In the following description, still image data is used as binary data.

As the method of linking meta-data to binary data,  
10   1) the first process of embedding the entire meta-data in still image data (Fig. 10A) and 2) the second process of attaching only meta-data linking information, for example file name, to still image data (Fig. 10B) will be described as examples.

15           Fig. 10A shows a data structure in which meta-data generated by the recording apparatus 200 are embedded in and linked to image data. In the example shown in Fig. 10A, the generated meta-data are embedded in the image data file. The meta-data embedding position is not limited to that  
20   shown in Fig. 10A. The meta-data may be embedded in the header section of the image data.

Referring to Fig. 10A, reference numeral 901 denotes image data having, e.g., a JPEG compression format; 902, a meta-data header; 903, a meta-data body; and 904, a  
25   meta-data footer. The identification information and size of the meta-data are recorded in each of the meta-data

header 902 and meta-data footer 904 to accurately recognize whether the meta-data is concatenated to the image data. The "CardInfo.xml" shown in Fig. 8 is recorded in the meta-data body 903.

5           When meta-data described as XML data is connected to the end of binary data, the meta-data can be registered without influencing other applications. More specifically, the information in the header section of binary data does not change from the state before connection  
10 of meta-data. For this reason, if the binary data is, e.g., image data, the image can be reproduced by a general browser. In this case, however, the connected meta-data is neglected.

15           Since the meta-data is described in the XML, many apparatuses capable of reading the XML format can read the information of meta-data, and the meta-data can be added, changed, or referred to using a tool for understanding the XML data, so it is excellent in versatility. As described above, when information that is known about image data is  
20 prepared as a meta-data template in advance, and meta-data is repeatedly attached to image data in image sensing, the time required to attach meta-data to the image data can be shortened.

25           Fig. 10B is shows a data structure after the information of meta-data generated by the recording apparatus 200 is attached to image data to link the

meta-data to the image data. In the example shown in Fig. 10B, only the meta-data file name is attached to the end of image data as the information of generated meta-data, and the meta-data file is independently present. The meta-data attachment position is not limited to that shown in Fig. 10B. The meta-data may be attached to the header section of the image data. In the example shown in Fig. 10B, the file name of generated meta-data is attached to the end of image data. However, information representing the location of meta-data file may be attached.

To record meta-data in image data, a standard called URL (Uniform Resource Locator) for specifying the physical location of data on the web or URN (Uniform Resource Name) for designating data using a unique name, or URI (Uniform Resource Identifier) as a standard currently under examination, inclusive of both the URL and URN, can be used. If the URI is widely used in the future, this can be optimally used to specify data on, e.g., the web. When JPEG is used to compress image data, an APP marker defined by the JPEG standard may be used to record meta-data.

Since the URI for specifying meta-data is recorded in image data, the image data and meta-data can be easily independently processed. Especially, the present invention can be widely used to, e.g., store meta-data on a network and read it using the URI. Additionally, when the URI of meta-data and that of image data have a

predetermined association, the correspondence between the image data and the meta-data can be easily grasped. For example, the correspondence can be recognized by referring to the file name. The present invention can save memory capacity of storage media to avoid copying and string the same meta-data repeatedly.

A method of repeatedly linking the same meta-data generated by the recording apparatus 200 to a plurality of image data input or generated by image sensing to generate image data having meta-data will be described next with reference to Figs. 11 and 12.

Fig. 11 is a schematic view showing an example in which the entire meta-data (file name: CardInfo.xml) is repeatedly copied and embedded in a plurality of still image data (file name: AUT\_001.jpg, AUT\_002.jpg, AUT\_003.jpg,...) input or generated by image sensing.

When image data (file name: AUT\_001.jpg) and meta-data file (file name: CardInfo.xml) which are independently present, as shown by (before linking) in Fig. 11, are linked to each other by the recording apparatus 200, the entire information of the meta-data is copied and embedded at the end of the image data (file name: AUT\_001.jpg), as shown by (after linking) in Fig. 11.

When the meta-data file (file name: CardInfo.xml) is linked to the second image data (file name: AUT\_002.jpg) by the recording apparatus 200 in the same manner as

described above, the entire information of the meta-data is copied and embedded at the end of the image data (file name: AUT\_002.jpg). Thus, the same meta-data generated by the recording apparatus 200 is repeatedly linked to a plurality of image data.

Fig. 12 is a schematic view showing an example in which only the meta-data information (file name: CardInfo.xml) is repeatedly attached to a plurality of still image data (file name: AUT\_001.jpg, AUT\_002.jpg, AUT\_003.jpg,...) input or generated by image sensing.

When image data (file name: AUT\_001.jpg) and meta-data file (file name: CardInfo.xml) which are independently present, as shown by (before linking) in Fig. 12, are linked to each other by the recording apparatus 200, information representing the meta-data file name (CardInfo.xml) is attached to the end of the image data, as shown by (after linking) in Fig. 12, so the image data is linked to the meta-data file (CardInfo.xml) that is actually present.

When the meta-data file (file name: CardInfo.xml) is linked to the second image data (file name: AUT\_002.jpg) by the recording apparatus 200 in the same manner as described above, information representing the meta-data file name (CardInfo.xml) is attached to the end of the image data (file name: AUT\_002.jpg), as shown by (after linking) in Fig. 12. Thus, the same meta-data generated by the

recording apparatus 200 is repeatedly linked to a plurality of image data (file name: AUT\_001.jpg, AUT\_002.jpg, AUT\_003.jpg,....)

In the example shown in Fig. 12, linking processing of attaching only the file name of meta-data is performed, instead of embedding the meta-data itself in the image data. In place of the meta-data file name, information representing the storage location where the meta-data file is stored can be attached to the image data.

#### 10 [Generation of Image Data Having Meta-Data]

Processing of linking meta-data to image data to generate image data having meta-data, as described with reference to Fig. 11 or 12, and storing the generated image data having meta-data, which is performed by the recording apparatus 200, will be described next with reference to the flow chart shown in Fig. 9. In the example to be described below, the same meta-data is repeatedly attached to each image sensed and converted into image data.

Instead of using the method to be described below, for example, a plurality of meta-data capable of explaining a plurality of image data to be sensed can be prepared in advance in correspondence with the plurality of image data, and the different meta-data can be selected and repeatedly attached to the sensed image data, respectively. First, 25 in step S800, the above-described meta-data (CardInfo.xml) stored in the storage section 102 is loaded to the RAM 106.

Alternatively, the above-described meta-data  
(CardInfo.xml) stored on the memory card 403 is loaded to  
the RAM 106 from the memory card 403 directly connected to  
the memory card slot 203 of the data input/output section  
5 100. In the above example, one meta-data stored in the  
storage section 102 or on the memory card 403 is read out  
and used. However, a plurality of stored meta-data may be  
read out and used.

In step S801, it is checked whether the loaded  
10 meta-data is described by an appropriate XML format. If  
NO in step S801, the flow advances to step S806 to display  
an XML error, and the operation is ended. If YES in step  
S801, the flow advances to step S802.

In step S802, image data sensed through the CCD 108  
15 is loaded to the RAM 106.

In step S803, the meta-data is linked to the image  
data to generate image data having meta-data. More  
specifically, when an instruction for linking the meta-data  
to the image data is issued (a process selected from the  
20 two processes described above), the meta-data is attached  
to the image data to generate image data having meta-data.  
For example, image data having meta-data shown in Fig. 10A  
or 10B is generated.

In step S804, the generated image data having  
25 meta-data is stored on the memory card 403 or in the storage  
section 102. This image data having meta-data may be stored

both on the memory card 403 and in the storage section 102.

In step S805, if the user wants to continue image sensing, the flow returns to step S802 to continuously perform the above-described processing, thereby generating  
5 new image data having meta-data shown in Fig. 11 or 12. For example, in the case shown in Fig. 11, the same meta-data is repeatedly attached to a plurality of image data to obtain image data having meta-data (file name: AUT\_002.jpg, AUT\_003.jpg, ....) When the user ends image sensing, the  
10 series of operations are ended.

As described above, only by generating meta-data once, in advance, the meta-data can be repeatedly attached to image data obtained by image sensing to generate image data having meta-data. For this reason, operation of  
15 generating the image data having meta-data is facilitated. The generated meta-data can also be repeatedly attached to a plurality of different image data not obtained by image sensing but input from the memory card 403 to generate image data having meta-data.

A plurality of meta-data may be generated in advance and selected as needed such that meta-data of different types are attached to a plurality of image data. In this embodiment, still image data is used as binary data. Instead, voice data or moving image data may be used as  
25 binary data.

In step S804, the image data having meta-data is



stored in, e.g., the storage section 102 or on the memory card 403 inserted into the data input/output section 100. However, the image data having meta-data may be stored on the memory card 403 as a first storage medium which had  
5 stored the original image data before meta-data attachment or another memory card as a second storage medium.

The image data having meta-data may be directly written in the external device 107 through the input terminal of the recording apparatus 200 or temporarily  
10 stored on the memory card 403 or in the storage section 102 and then written in the external device 107 through the memory card 403 or storage section 102.

The external device 107 and data input/output section 100 can be connected not directly as described above but  
15 by using a wireless channel. In this case, a wireless channel interface corresponding to the external device 107 is incorporated in the data input/output section 100.

The meta-data may be generated in advance, as described above, or meta-data prepared on a memory card in  
20 advance may be used. Fig. 13 is a view showing this example. In this example, for example, a memory card for travel is put on sale, and meta-data for travel which is stored on the memory card, in advance, is used. A memory card in which  
meta-data for moving images, meta-data for voice data, and  
25 meta-data for still images are prepared in advance in correspondence with binary data may be used.

[Second Embodiment]

As a recording apparatus of the second embodiment, a recording apparatus 2200 (Fig. 14) capable of loading binary data stored in a storage medium or the like, generating meta-data as information related to the binary data, and linking the generated meta-data to a plurality of loaded binary data to generate and output binary data each having meta-data will be described. In the following description, still image data is used as binary data.

10 [Hardware Configuration of Recording Apparatus]

Fig. 14 is a block diagram showing the system configuration of the recording apparatus 2200.

A data input/output section 2100 inputs/outputs binary data or meta-data. As shown in Fig. 16, a memory card such as a PC card or PCMCIA card 109 is directly inserted. As shown in Fig. 16, a memory card such as a compact flash 111 or smart medium 113 is inserted via an adapter 110 or card adapter 112. Instead of a memory card, a removable storage medium (not shown) may be used.

20 The data input/output section 2100 is connected to an external device 2107 such as a digital camera via an input terminal such as a USB terminal, SCSI terminal, or parallel terminal. In the following description, a USB terminal is used as an input terminal.

25 Data (meta-data or binary data) recorded by the external device 2107 is directly loaded from the external

device 2107 to the recording apparatus 2200 through an input terminal, or temporarily stored on a memory card 403 and then loaded to the recording apparatus 2200 through the memory card 403.

5           Conversely, data processed by the recording apparatus 2200 is directly written in the external device 2107 through an output terminal, or temporarily stored on the memory card 403 and then written in the external device 2107 through the memory card 403. The data processed by  
10 the recording apparatus 2200 is written in a storage section 2102. The external device 2107 and data input/output section 2100 can be connected not directly as described above but by using a wireless channel. In this case, a wireless channel interface corresponding to the external  
15 device 2107 is incorporated in the data input/output section 2100.

An input section 2101 inputs data or instructions from the user and is formed from, e.g., a keyboard, mouse, remote controller, and the like. The storage section 2102  
20 stores binary data or meta-data and is formed from, e.g., a hard disk.

A display section 2103 displays a GUI or image data and is constructed by, e.g., a CRT or liquid crystal display.

25           A CPU 2104 controls the entire recording apparatus 2200. A ROM 2105 and RAM 2106 provide to the CPU 2104 a

program, data, and work area necessary for processing by the CPU 2104.

Control programs necessary for processing operations shown in the flow charts of Figs. 5, 6, 17, and 18 are stored  
5 in the storage section 2102 or ROM 2105. When the storage section 2102 stores a control program, it is temporarily loaded to the RAM 2106 and then executed.

Although the system configuration includes various components in addition to the above components, a detailed  
10 description thereof will be omitted because they are not main components of the present invention.

Figs. 15A and 15B are views showing the outer appearance of the recording apparatus 2200. The front surface shown in Fig. 15A has a slot as one member of the  
15 data input/output section 2100, so data can be loaded into the recording apparatus 2200 through the memory card 403 inserted into the slot.

A power switch 2202 powers on/off the recording apparatus 2200. An infrared light-receiving section 2203  
20 receives a signal from a wireless keyboard 2204 or remote controller 2205. The wireless keyboard 2204 and remote controller 2205 are used as members of the input section 2101.

The rear view shown in Fig. 15B has a display output  
25 terminal 2206 to which the display section 2103 such as a CRT or liquid crystal display is connected. To directly

connect the recording apparatus to the external device 2107 such as a digital camera, a USB terminal 2307 as an input terminal or a member of the data input/output section 2100 is used. An input terminal such as a SCSI terminal (not shown) or parallel terminal (not shown) may be available at an arbitrary position on the front or rear surface of the recording apparatus 2200.

[Input of Meta-Data]

A series of operations of generating information of still image data as meta-data and storing it on the memory card 403 or the like using the recording apparatus 2200 will be described next in detail. First, an input method of registering meta-data will be described with reference to Fig. 4.

Fig. 4 is a view showing a GUI window used to register meta-data.

The GUI window has display/input sections 301 to 304 for displaying meta-data registered in advance or displaying newly generated meta-data, buttons 3011, 3021, 3031, and 3041 used to display lists of registered meta-data, "add" buttons 305, 307, and 308 for adding information input using the wireless keyboard 2204 or remote controller when no appropriate information is present in the displayed list and the user wants to add new information, a "change" button 306 for changing the date and time of image sensing of still image data input using the wireless keyboard 2204 and an

"OK" button 309 for determining meta-data to be registered after the end of selection, addition, and change of meta-data to be registered.

A method of registering detailed items "Who?",  
5 "When?", "Where?", and "What?" as meta-data information of still image data using the GUI window shown in Fig. 4 will be described next.

Assume that "Who?" is "Taro", "When?" is "1999-6-14",  
"Where?" is "athletic park", and "What?" is "athletic  
10 meeting", and these meta-data are selected from lists or newly input and registered as meta-data.

"Who?" will be described first. When the button 3011 having an inverted triangular shape at the right end of the display/input section 301 is pressed, the first contents  
- of the list registered for the button 3011 are displayed  
15 on the display/input section 301. When the button 3011 having an inverted triangular shape is pressed twice, the second contents of the list registered in advance for the button 3011 are displayed on the display/input section 301.  
20 Thus, the button 3011 is repeatedly pressed to search for "Taro" registered in the list in advance. If "Taro" is not present in the registered list, "Taro" is input using the wireless keyboard 2204, and the "add" button 305 is pressed to add "Taro" to the item "Who?".

25 "When?" will be described next. Upon activating the GUI window, the current date and time are displayed on the

display/input section 302. If the date is different from the date of image sensing, the date of image sensing or "1999-06-14" is input using the wireless keyboard 2204, and then the "change" button 306 is pressed to add "1999-06-14" to the item "When?".

"Where?" will be described next. When the button 3031 having an inverted triangular shape at the right end of the display/input section 303 is pressed, the first contents of the list registered for the button 3031 in advance are displayed on the display/input section 303. When the button 3031 having an inverted triangular shape is pressed twice, the second contents of the list registered in advance for the button 3031 are displayed on the display/input section 303. Thus, the button 3031 is repeatedly pressed to search for "athletic park" registered in the list in advance. If "athletic park" is not present in the registered list, "athletic park" is input using the wireless keyboard 2204, and the "add" button 307 is pressed to add "athletic park" to the item "Where?".

"What?" will be described next. When the button 3041 having an inverted triangular shape at the right end of the display/input section 304 is pressed, the first contents of the list registered for the button 3041 in advance are displayed on the display/input section 304. When the button 3041 having an inverted triangular shape is pressed twice, the second contents of the list registered in advance

for the button 3041 are displayed on the display/input section 304. Thus, the button 3041 is repeatedly pressed to search for "athletic meeting" registered in the list in advance. If "athletic meeting" is not present in the registered list, "athletic meeting" is input using the wireless keyboard 2204, and the "add" button 308 is pressed to add "athletic meeting" to the item "What?".

After all the items "Who?", "When?", "Where?", and "What?" are input, the "OK" button 309 is pressed to determine the set items, thereby ending meta-data registration.

As meta-data registration, only the method of displaying, selecting, and inputting the items "Who?", "When?", "Where?", and "What?" has been described above. A method of displaying, selecting, and inputting another item on the window can be added.

#### [Generation and Storage of Meta-Data]

A series of operations of generating meta-data and storing it on the memory card 403 or in the storage section 2102 using the recording apparatus 2200 will be described next in detail with reference to Figs. 5, 6, 17, and 8.

Fig. 5 is a flow chart showing processing of generating meta-data and storing the generated meta-data on the memory card 403 by the recording apparatus 2200.

First, in step S401, list files "Who?", "When?", "Where?", and "What?" which are to be registered for the



buttons 3011, 3021, 3031, and 3041 and displayed on the display/input sections 301 to 304 are loaded to the RAM 2106.

In step S402, the loaded lists are displayed on the GUI window shown in Fig. 4.

In step S403, the user inputs meta-data "Who?", "When?", "Where?", and "What?" to the display/input sections 301 to 304, respectively. The input method has already been described above in detail with reference to Fig. 4, and a detailed description thereof will be omitted.

In step S404, when the "OK" button 309 shown in Fig. 4 is pressed, a meta-data file is generated on the basis of the input meta-data using a data description language, i.e., a markup language such as the XML shown in Fig. 8.

In the example shown in Fig. 8, the input meta-data are registered as a meta-data file with a file name: "CardInfo.xml". To describe the meta-data, a markup language XML is used. Instead of the XML, the SGML or HTML can be used.

In step S405, the generated meta-data file is written on the memory card 403 through the data input/output section 2100 and stored with the file name: "CardInfo.xml". Write processing on the memory card 403 or in the storage section 2102 will be described later in detail with reference to Fig. 17, and a detailed description thereof will be omitted. The generated meta-data file is also stored in the storage

section 2102 of the recording apparatus 2200, as needed.

In the above-described example, one meta-data file is generated. However, a plurality of meta-data files may be generated. In this case, a meta-data file can be  
5 repeatedly generated to generate a plurality of meta-data files.

[Generation of Meta-Data File]

Fig. 6 is a flow chart showing meta-data file generation executed by the recording apparatus 2200 in step  
10 S404 on the basis of the input value of meta-data input by the user in step S403.

First, in step S501, it is checked whether the button 3011, 3021, 3031, or 3041 is pressed. If NO in step S501, processing waits until input is detected. If YES in step  
15 S501, the flow advances to step S502. When any one of the buttons 305 to 308 is pressed, the flow advances to step S503. When the button 309 is pressed, the flow advances to step S504.

When step S502 is selected, the contents of a list  
20 corresponding to one of the list display buttons 3011, 3021, 3031, and 3041 are displayed, and the flow advances to step S505. When the list file displayed in correspondence with one of the list display buttons 3011, 3021, 3031, and 3041 is selected, the flow advances to step S506. After the  
25 selected item is copied to the input area, the flow returns to step S501. When the displayed list file is not selected

in step S505, the flow returns to step S501 without any processing.

When step S503 is selected, it is checked whether the "add" button 305, 307, or 308 is pressed or whether the "change" button 306 is pressed. When the "add" button 305, 307, or 308 is pressed, the flow advances to step S507. After the contents of the display/input section, which are added by the user using the keyboard, are added to a corresponding list file, the flow advances to step S508. When the "change" button 306 is pressed, the flow advances to step S508 without any processing. In step S508, the date and time in the list file are changed to the contents on the display/input section, and the flow returns to step S501.

When step S504 is selected, and the "OK" button is pressed, a meta-data file is generated, and the series of operations are ended.

Thus, the meta-data file shown in Fig. 8 is generated.

In the above-described example, the user inputs meta-data using the wireless keyboard 2204. As another input method, an arbitrary input method such as voice input from a remote controller using a G code, input using voice recognition, or input from an external device through a network can be used.

Fig. 8 will be described. To describe meta-data, the

XML is used. The XML (eXtensible Markup Language) is a markup language used by applications that require functions beyond the current HTML (HyperText Markup Language). The XML developed by the World Wide Web consortium mainly has the following characteristic features.

1. An information provider can freely define new tags and attribute names.
2. A document can have any complex nested structure.
3. A description of syntax can be optionally embedded in an XML document, and an application can be made to verify the validity of structure using this syntax.

The description by the XML shown in Fig. 8 can be written using a general-purpose text editor program. However, to generate a so-called "wellformed XML" in which, e.g., <PHOTO> and </PHOTO> or <ITEM> and </ITEM> correctly correspond, an XML editor program can be conveniently used. [Write of Meta-Data on Memory Card]

Fig. 17 is a flow chart showing processing of writing the meta-data shown in Fig. 8 in the storage section 2102 or on the memory card 403, which is executed in step S405 shown in Fig. 5.

First, in step S601, to execute write processing on the memory card 403, the memory card 403 such as a PC card is inserted into the data input/output section 2100. Alternatively, the recording apparatus 2200 may be connected to the memory card 403 inserted into the external

device 2107 through the input terminal of the data input/output section 2100.

After completion of connection, in step S602, the meta-data generated in step S404 is written on the memory  
5 card 403.

In step S603, if the apparatus has an ejection function for the memory card 403, the memory card 403 is ejected, and processing is ended.

In the above-described example, to write meta-data  
10 on the memory card 403, the meta-data is written on the memory card 403 which is directly inserted and connected to the data input/output section 2100, or the meta-data is written, through the input terminal, on the memory card 403 inserted into the external device 2107. Any other  
15 connection method such as wireless connection as described above can be used as long as the memory card 403 is accessible. The meta-data can also be written in the storage section 2102.

[Meta-Data Linking Processing to A Plurality of Binary  
20 Data]

Two processes of linking the above-described generated meta-data to binary data will be described next with reference to Fig. 18 and Figs. 10 to 12. In the following description, still image data is used as binary  
25 data.

As the method of linking meta-data to binary data,

1) the first process of embedding all the meta-data in still image data (Fig. 10A) and 2) the second process of attaching only meta-data information to still image data (Fig. 10B) will be described as examples.

5            Fig. 10A is a schematic view showing a data structure in which meta-data generated by the recording apparatus 2200 are embedded in and linked to image data. In the example shown in Fig. 10A, the generated meta-data are embedded following the image data. The meta-data  
10           embedding position is not limited to that shown in Fig. 10A. The meta-data may be embedded in the header section of the image data.

             Referring to Fig. 10A, reference numeral 901 denotes image data having, e.g., a JPEG compression format; 902, a meta-data header; 903, a meta-data body; and 904, a  
15           meta-data footer. The identification information and size of the meta-data are recorded in each of the meta-data header 902 and meta-data footer 904 to accurately recognize whether the meta-data is linked to the image data. The  
20           "CardInfo.xml" shown in Fig. 8 is recorded in the meta-data body 903.

             When meta-data described as XML data is connected to the end of binary data, the meta-data can be registered without influencing other applications. More  
25           specifically, the information in the header section of binary data does not change from the state before connection

of meta-data. For this reason, if the binary data is, e.g., image data, the image can be reproduced by a general browser. In this case, however, the connected meta-data is neglected.

5           Since the meta-data is described in the XML, many apparatuses capable of reading the XML format can read the information of meta-data, and the meta-data can be added, changed, or referred to using a tool for understanding the XML data, so it is excellent in versatility. As described  
10   above, when information that is known about image data is prepared as a meta-data template in advance, and meta-data is repeatedly attached to image data, the time required to attach meta-data to the image data can be shortened.

Fig. 10B is a schematic view showing a data structure  
15   after the information of meta-data generated by the recording apparatus 2200 is attached to image data to link the meta-data to the image data. In the example shown in Fig. 10B, only the meta-data file name (CardInfo.xml) is attached to the end of image data as the information of  
20   generated meta-data, and the meta-data file is independently present. The meta-data attachment position is not limited to that shown in Fig. 10B. The meta-data may be attached to the header section of the image data. In the example shown in Fig. 10B, the file name of generated  
25   meta-data is attached to the end of image data. However, information representing the location of meta-data file may

be attached.

To record meta-data in image data, a standard called URL (Uniform Resource Locator) for specifying the physical location of data on the web or URN (Uniform Resource Name) for designating data using a unique name, or URI (Uniform Resource Identifier) as a standard currently under examination, inclusive of both the URL and URN, can be used. If the URI will be widely used in the future, this can be optimally used to specify data on, e.g., the web. When JPEG is used to compress image data, an APP marker defined by the JPEG standard may be used to record meta-data.

Since the URI for specifying meta-data is recorded in image data, the image data and meta-data can be easily independently processed. Especially, the present invention can be widely used to, e.g., store meta-data on a network and read it using the URI. Additionally, when the URI of meta-data and that of image data have a predetermined association, the correspondence between the image data and the meta-data can be easily grasped. For example, the correspondence can be recognized by referring to the file name. The present invention can save memory capacity of storage media to avoid copying and storing the same meta-data repeatedly.

A method of repeatedly linking the same meta-data generated by the recording apparatus 2200 to a plurality of input image data to generate image data having meta-data



will be described next with reference to Figs. 11 and 12.

Fig. 11 is a schematic view showing an example in which the whole meta-data (file name: CardInfo.xml) is repeatedly copied and embedded in a plurality of input still  
5 image data (file name: AUT\_001.jpg, AUT\_002.jpg, AUT\_003.jpg,...)

When image data (file name: AUT\_001.jpg) and meta-data file (file name: CardInfo.xml) which are independently present, as shown by (before linking) in  
10 Fig. 11, are linked to each other by the recording apparatus 2200, the whole information of the meta-data is copied and embedded at the end of the image data (file name: AUT\_001.jpg), as shown by (after linking) in Fig. 11.

When the meta-data file (file name: CardInfo.xml) is  
15 linked to the second image data (file name: AUT\_002.jpg) by the recording apparatus 2200 in the same manner as described above, the whole information of the meta-data is copied and embedded at the end of the image data (file name: AUT\_002.jpg). Thus, the same meta-data generated by the  
20 recording apparatus 2200 is repeatedly linked to a plurality of image data.

Fig. 12 is a schematic view showing an example in which only meta-data information (file name: CardInfo.xml) is repeatedly attached to a plurality of input still image  
25 data (file name: AUT\_001.jpg, AUT\_002.jpg, AUT\_003.jpg,...)

When image data (file name: AUT\_001.jpg) and meta-data file (file name: CardInfo.xml) which are independently present, as shown by (before linking) in Fig. 12, are linked to each other by the recording apparatus 2200, information representing the meta-data file name (CardInfo.xml) is attached to the end of the image data, as shown by (after linking) in Fig. 12, so the image data is linked to the meta-data file (CardInfo.xml) that is actually present.

When the meta-data file (file name: CardInfo.xml) is linked to the second image data (file name: AUT\_002.jpg) by the recording apparatus 2200 in the same manner as described above, information representing the meta-data file name (CardInfo.xml) is attached to the end of the image data (file name: AUT\_002.jpg), as shown by (after linking) in Fig. 12. Thus, the same meta-data generated by the recording apparatus 2200 is repeatedly linked to a plurality of image data.

In the example shown in Fig. 12, linking processing of attaching only the file name of meta-data is performed, instead of embedding the meta-data itself in the image data. In place of the meta-data file name, information representing the storage location where the meta-data file is stored can be attached to the image data.

[Generation of Image Data Having Meta-Data]

Processing of linking meta-data to image data to

generate image data having meta-data, as described with reference to Fig. 11 or 12, and storing the generated image data having meta-data, which is performed by the recording apparatus 2200, will be described next with reference to 5 the flow chart shown in Fig. 18. In the example to be described below, the same meta-data is attached to all image data stored on the memory card 403 at once.

Instead of using the method to be described below, for example, the same meta-data can be attached to a 10 plurality of selected image data. Different meta-data can be attached to a plurality of selected image data, respectively. Image data stored in the memory of the external device 2107 may be used.

First, in step S1800, the above-described meta-data 15 (CardInfo.xml) stored in the storage section 2102 is loaded to the RAM 2106. Alternatively, the above-described meta-data (CardInfo.xml) stored on the memory card 403 is loaded to the RAM 2106 from the memory card 403 directly connected to the data input/output section 2100 or the 20 memory card 403 inserted into the external device 2107 connected through the input terminal. In the above example, one meta-data stored on the memory card 403 is read out and used. However, a plurality of stored meta-data may be read out and used. The meta-data remaining on the memory card 25 403 is erased after it is loaded to the RAM 2106.

In step S1801, it is checked whether the loaded

meta-data is described by an appropriate XML format. If NO in step S1801, the flow advances to step S1806 to display an XML error, and the operation is ended. If YES in step S1801, the flow advances to step S1802.

- 5           In step S1802, image data is loaded from the memory card 403 to the RAM 2106 through the data input/output section 2100. The image data loaded from the memory card is erased from the memory card 403.

- 10           In step S1803, the meta-data is linked to the image data to generate image data having meta-data. More specifically, when an instruction for linking the meta-data to the image data is issued (a process selected from the two processes described above), the meta-data is attached to the image data to generate image data having meta-data.
- 15   For example, image data having meta-data shown in Fig. 10A or 10B is generated.

- 20           In step S1804, the generated image data having meta-data is stored on the memory card 403 or in the storage section 2102. This image data having meta-data may be stored both on the memory card 403 and in the storage section 2102.

- 25           In step S1805, it is determined whether unloaded image data remains on the memory card 403. If YES in step S1805, the flow returns to step S1802 to continuously perform the above-described processing, thereby generating new image data having meta-data shown in Fig. 11 or 12. For

example, in the case shown in Fig. 11, the same meta-data is repeatedly attached to a plurality of image data to obtain image data having meta-data (file name: AUT\_002.jpg, AUT\_003.jpg,...)

5           On the other hand, if it is determined in step S1805 that loading of all image data on the memory card 403 and meta-data attachment to each image data are completed, the series of operations are terminated.

10           As described above, only by generating meta-data once in advance, the meta-data can be repeatedly attached to a plurality of different image data input from the memory card 403. For this reason, the operation of attaching the meta-data to image data is facilitated. A plurality of meta-data may be generated in advance and selected as needed  
15           such that meta-data of different types are attached to a plurality of image data. In this embodiment, still image data is used as binary data. Instead, voice data or moving image data may be used as binary data.

20           In step S1802, image data are loaded from the memory card 403 to the RAM 2106 one by one, and each image data which has been loaded is erased from the card 403. Instead, all image data may be sequentially loaded from the memory card 403 to the RAM 2106, and the image data which have been loaded may be erased at once.

25           In step S1804, the image data having meta-data is stored in, e.g., the storage section 2102 or on the memory

card 403 inserted into the data input/output section 2100.  
However, the image data having meta-data may be stored on  
the memory card 403 as a first storage medium which stores  
image data before meta-data attachment or another memory  
5 card as a second storage medium.

The image data having meta-data may be directly  
written in the external device 2107 through the output  
terminal of the recording apparatus 2200 or temporarily  
stored on the memory card 403 or in the storage section 2102  
10 and then written in the external device 2107 through the  
memory card 403 or storage section 2102.

The external device 2107 and data input/output  
section 2100 can be connected not directly as described  
above but using a wireless channel. In this case, a  
15 wireless channel interface corresponding to the external  
device 2107 is prepared in the data input/output section  
2100.

The meta-data may be generated in advance, as  
described above, or meta-data prepared on a memory card in  
20 advance may be used. Fig. 13 is a view showing this example.  
In this example, for example, a memory card for travel is  
put on sale, and meta-data for travel which is stored on  
the memory card in advance is used. A memory card in which  
meta-data for moving images, meta-data for voice data, and  
25 meta-data for still images are prepared in advance in  
correspondence with binary data may be used.

[Third Embodiment (1)]

As a first recording apparatus according to the third embodiment, a recording apparatus 3200 (see Fig. 20) capable of loading meta-data stored in a storage medium or the like, generating still image data as binary data, and linking the loaded meta-data to a plurality of generated binary data to generate and output binary data each having meta-data will be described. The meta-data is generated by a dedicated meta-data generation apparatus 4000 (see Fig. 19) and supplied to the recording apparatus 3200 through a portable storage medium or the like.

[Hardware Configuration of Meta-Data Generation Apparatus and Recording Apparatus]

Figs. 19 and 20 are block diagrams showing the system configurations of the meta-data generation apparatus 4000 and recording apparatus 3200.

A data input/output section 4100 inputs/outputs data (binary data or meta-data). As shown in Fig. 25, a memory card 403 such as a PC card or PCMCIA card 4109 is directly inserted into the slot. As shown in Fig. 25, the memory card 403 such as a compact flash 4111 or smart medium 4113 is inserted into the slot via an adapter 4110 or card adapter 4112. Instead of the memory card 403, a removable medium (not shown) may be used.

The meta-data generation apparatus 4000 is directly connected to the recording apparatus 3200 via the input

terminal of the data input/output section 4100, such as a USB terminal, SCSI terminal, or parallel terminal. In the following description, a USB terminal is used as an input terminal. Data output from the meta-data generation  
5 apparatus 4000 is directly loaded from the meta-data generation apparatus 4000 to the recording apparatus 3200 through the input terminal, or temporarily stored on the memory card 403 and then loaded to the recording apparatus 3200 through the memory card 403.

10           Conversely, data processed by the recording apparatus 3200 is directly written in the meta-data generation apparatus 4000 through the input terminal, or temporarily stored on the memory card 403 and then written in the meta-data generation apparatus 4000 through the  
15 memory card 403. The recording apparatus 3200 and data input/output section 4100 can be connected not directly as described above but using a wireless channel. In this case, a wireless channel interface is prepared in the data input/output section 4100.

20           Input sections 4101 and 4107 input data or an instruction from the user and is comprised of, e.g., a keyboard, mouse, remote controller, and the like. The storage section 4102 stores data and is formed from, e.g., a hard disk.

25           A display section 4103 displays a GUI or image and is constructed by, e.g., a CRT or liquid crystal display.



A CPU 4104 controls the entire meta-data generation apparatus 4000. A ROM 4105 and RAM 4106 provide to the CPU 4104 a program, data, and work area necessary for processing by the CPU 4104.

5            Necessary control programs are stored in the storage section 4102 or ROM 4105. When the storage section 4102 stores a control program, it is temporarily loaded to the RAM 4106 and then executed.

10           Although the system configuration includes various components in addition to the above components, a detailed description thereof will be omitted because they are not main components of the present invention.

15           Figs. 27A and 27B are views showing the outer appearance of the meta-data generation apparatus 4000. The front surface shown in Fig. 27A has a memory card slot as one member of the data input/output section 4100, so data can be loaded into the meta-data generation apparatus 4000 through the memory card 403 inserted into the slot.

20           A power switch 4202 powers on/off the meta-data generation apparatus 4000. An infrared light-receiving section 4203 receives a signal from a wireless keyboard 4204 or remote controller 4205 as one member of the input section.

25           The rear surface shown in Fig. 27B has a display output terminal 4306 to which the display section 4103 such as a CRT or liquid crystal display is connected. To

directly connect the meta-data generation apparatus 4000 to the recording apparatus 3200, a USB terminal as an input terminal 4307 or a member of the data input/output section 4100 is used. As the input terminal 4307, a SCSI terminal  
5 (not shown) or parallel terminal (not shown) may be prepared at an arbitrary position on the front or rear surface of the meta-data generation apparatus 4000.

The recording apparatus 3200 will be described next with reference to Fig. 20.

10 A data input/output section 3100 inputs/outputs data (binary data or meta-data). The structure of a memory card slot as one member of the data input/output section 3100 is the same as that described with reference to Fig. 25, and a detailed description thereof will be omitted.

15 The recording apparatus 3200 is directly connected to the meta-data generation apparatus 4000 via an input terminal such as a USB terminal, SCSI terminal, or parallel terminal as one member of the data input/output section 3100. In the following description, a USB terminal is used as an  
20 input terminal.

Data (binary data or meta-data) recorded by the meta-data generation apparatus 4000 is directly loaded from the meta-data generation apparatus 4000 to the recording apparatus 3200 through the input terminal, or temporarily  
25 stored on the memory card 403 and then loaded to the recording apparatus 3200 through the memory card 403.

Conversely, data processed by the recording apparatus 3200 is directly written in the meta-data generation apparatus 4000 through the input terminal, or temporarily stored on the memory card 403 and then written in the meta-data generation apparatus 4000 through the memory card 403. Data processed by the recording apparatus 3200 is written in a storage section 3102. The meta-data generation apparatus 4000 and data input/output section 3100 can be connected not directly as described above but using a wireless channel. In this case, a wireless channel interface is prepared in the data input/output section 3100.

An input section 3101 inputs data or an instruction from the user and is formed from, e.g., operation buttons, shutter button, and the like. The storage section 3102 stores data and is formed from, e.g., a hard disk. A display section 3103 displays a GUI or image and is constructed by, e.g., a CRT or liquid crystal display.

A CPU 3104 controls the entire recording apparatus 3200. A ROM 3105 and RAM 3106 provide to the CPU 3104 a program, data, and work area necessary for processing by the CPU 3104. Necessary control programs are stored in the storage section 3102 or ROM 3105. When the storage section 3102 stores a control program, it is temporarily loaded to the RAM 3106 and then executed.

A CCD 3108 converts an optical image obtained by image

sensing into an electrical signal, thereby generating image data. To convert voice into an electrical signal to generate voice data, a microphone (not shown) can be used in place of the CCD 3108. Although the system configuration includes various components in addition to the above components, a detailed description thereof will be omitted because they are not main components of the present invention. Figs. 28A and 28B are views showing the outer appearance of the recording apparatus 3200. The front surface shown in Fig. 28A has an image sensing lens 3201, and the upper surface has an image sensing button as a member of the input section 3101. The side surface shown in Fig. 28A has a memory card slot as a member of the data input section 3100, so data can be loaded into the recording apparatus 3200 through the memory card 403 inserted into the slot. The side surface also has a USB terminal 3204 as an input terminal as another member of the data input section 3100, through which the meta-data generation apparatus 4000 can be connected, thereby enabling exchange of meta-data or image data.

The rear surface shown in Fig. 28B has a liquid crystal panel as the display section 3103, so sensed image data can be displayed, or a GUI for meta-data attachment can be displayed. The rear surface has operation buttons 3206 as members of the input section 3101, which are used for adjustment in image sensing, or to input meta-data or

attach meta-data to image data.

In the example shown in Fig. 28A, only the USB terminal 3204 is shown as an input terminal. Any other input terminal such as a parallel terminal or SCSI terminal may be used as far as it can transmit/receive data. The meta-data generation apparatus 4000 and data input/output section 3100 can be connected not directly as described above but using a wireless channel. In this case, a wireless channel interface corresponding to the meta-data generation apparatus 4000 is included in the data input/output section 3100.

Fig. 21 is a block diagram showing the functional arrangement using the meta-data generation apparatus 4000 and recording apparatus 3200. The meta-data generation apparatus 4000 comprises a meta-data generation section 3401 and recording section 3402. The meta-data generation section 3401 generates meta-data. The recording section 3402 records the meta-data generated by the meta-data generation section on a memory card. The operation of the meta-data generation section 3401 is performed under the control of the CPU 4104 which controls the control program stored in the ROM 4105 using the work area of the RAM 4106. The operation of storing meta-data on the memory card 403 by the recording section 3402 is performed through the data input/output section 4100.

The recording apparatus 3200 comprises a reading

section 3404, image data generation section 3405, and recording section 3406. The reading section 3404 reads out data stored on the memory card 403 through the data input/output section 4100. The image data generation section 3405 generates RGB image data from an image signal obtained by the CCD 3108 or an image compressed by JPEG or the like, as needed. The recording section 3406 links image data to meta-data and outputs the data to the memory card 403 as a first or second recording medium. The operations of the image data generation section 3405 and recording section 3406 are performed under the control of the CPU 3104 which controls the control program stored in the ROM 3105 using the work area of the RAM 3106.

[Generation and Storage of Meta-Data and Binary Data Having Meta-Data]

Generation and storage of meta-data and binary data having meta-data using the meta-data generation apparatus 4000 and recording apparatus 3200 according to the third embodiment (1) will be described below in detail. To generate binary data having meta-data, a method of embedding the entire meta-data in binary data or a method of embedding only meta-data information (e.g., a file name) in binary data is used. These methods will be sequentially described below.

Assume that various events of an athletic meeting are to be sensed using the recording apparatus 3200. Before

image sensing or in preparing for the athletic meeting, the user inserts the memory card 403 into the meta-data generation apparatus 4000 and records pieces of information known in advance, including the name of event to be sensed, 5 image sensing location, and data and time of image sensing, as a meta-data template.

[Generation and Storage of Meta-Data by Meta-Data Generation Apparatus]

For example, when pieces of information are known, 10 including the date "1999, July 14", the user name "Taro", the event name "athletic meeting", and the location "athletic park", the meta-data generation apparatus 4000 generates meta-data shown in Fig. 8.

The meta-data input method and meta-data generation 15 method using the meta-data generation apparatus 4000 to obtain the meta-data shown in Fig. 8 are the same as described about the recording apparatus 2200 of the second embodiment. That is, the contents are the same as those described in detail in paragraphs [Input of Meta-Data] to 20 [Write of Meta-Data in Storage Section or on Memory Card] with reference to Figs. 4 to 7, and a detailed description thereof will be omitted.

The generated XML data shown in Fig. 8 is recorded on the root directory of the memory card 403 with a file 25 name "CardInfo.xml". When this operation is completed, the user removes the memory card 403 from the meta-data

generation apparatus 4000 and inserts it into the recording apparatus 3200.

[Generation Of Image Data and Image Data Having Meta-Data by Recording Apparatus]

5           At the site of image sensing, i.e., in the athletic meeting, the user senses an image using the recording apparatus 3200. Note that the memory card 403 which stores the meta-data generated by the meta-data generation apparatus 4000 is kept inserted into the recording  
10 apparatus 3200.

          In image sensing, when the user presses an image sensing button 3202 of the input section 3101, an image signal is stored in the CCD 3108, converted into RGB image data, and compressed to JPEG data. When compression is  
15 ended, the recording apparatus 3200 reads out the meta-data (CardInfo.xml) from the memory card 403 through the data input/output section 3100, links the meta-data (CardInfo.xml) to the image data to generate image data having meta-data shown in Fig. 22 or 10B, and writes the  
20 generated image data having meta-data on the memory card 403 or the like. Thus, image data having meta-data is generated and stored on the memory card 403 or the like.

          Processing of linking the meta-data to the image data obtained by image sensing to generate image data having  
25 meta-data and storing the generated image data having meta-data on the memory card 403 by the recording apparatus



3200 will be described next in detail with reference to Fig. 26 and Figs. 10A to 12.

As the method of generating image data having meta-data using the recording apparatus 3200, 1) the first method of embedding all the meta-data in still image data or 2) the second process of attaching only meta-data information to still image data can be used. These two methods are the same as those described about the recording apparatus 200 of the first embodiment. That is, the contents are the same as those described in detail in paragraphs [Processing of Linking Meta-Data to A Plurality of Binary Data] with reference to Figs. 10A to 12, and a detailed description thereof will be omitted.

[Processing of Storing Generated Image Data Having Meta-Data]

Processing of linking meta-data to image data to generate image data having meta-data, as described with reference to Figs. 11 and 12, and storing the generated image data having meta-data by the recording apparatus 3200 will be described next with reference to the flow chart shown in Fig. 26. In the example to be described below, the same meta-data is repeatedly attached to each image data generated by image sensing.

Instead of using the method to be described below, for example, a plurality of meta-data can be prepared in advance in correspondence with a plurality of image data

to be sensed, and the different meta-data can be selected and repeatedly attached to the image data, respectively.

First, in step S2801, the image data generated through the CCD 3108 is loaded to the RAM 3106.

5           In step S2802, the above-described meta-data (CardInfo.xml) stored on the memory card 403 is loaded to the RAM 106 through the data input/output section 4100. In the above example, one meta-data stored on the memory card 403 is read out and used. However, a plurality of stored  
10 meta-data may be read out and used.

          In step S2803, it is checked whether the loaded meta-data is described by an appropriate XML format. If NO in step S2803, the flow advances to step S2805 to display an XML error, and the operation is ended. If YES in step  
15 S2803, the flow advances to step S2804. To determine the appropriate format, it is checked whether the description format of an XML file is satisfied (e.g., whether a tag has a correct pair of left and right angle brackets, or the tag format is correct). Determining whether or not the XML  
20 data has an appropriate format may include checking whether or not the XML data is valid. Whether or not the XML data is valid is determined by checking, e.g., whether or not the XML data is described in accordance with the schema of DTD (Document Type Definition).

25           In step S2804, the meta-data is linked to the image data to generate image data having meta-data. More

specifically, when an instruction for linking the meta-data to the image data is issued, the meta-data is attached to the image data to generate image data having meta-data. That is, image data having meta-data shown in Fig. 10A or 5 10B is generated.

In step S2805, the generated image data having meta-data is stored on the memory card 403, and the operation is ended. This image data having meta-data may be stored in the storage section 4102 or both on the memory 10 card 403 and in the storage section 3102.

If the user wants to continue image sensing, the above-described series of operations are repeatedly performed from the beginning, thereby generating new image data having meta-data shown in Fig. 11 or 12. For example, 15 in the case shown in Fig. 11, the same meta-data is repeatedly attached to a plurality of image data to obtain image data having meta-data (file name: AUT\_002.jpg, AUT\_003.jpg,....)

As described above, only by generating meta-data once 20 in advance, the meta-data can be repeatedly attached to image data obtained by image sensing to generate image data having meta-data. For this reason, operation of generating the image data having meta-data is facilitated. The generated meta-data can also be repeatedly attached to 25 even a plurality of different image data not obtained by image sensing but input from the memory card 403 to generate

image data having meta-data.

A plurality of meta-data may be generated in advance and selected as needed such that meta-data of different types are attached to a plurality of image data. In this  
5 embodiment, still image data is used as binary data. Instead, voice data or moving image data may be used as binary data.

In step S2804, the image data having meta-data is stored in, e.g., the storage section 3102 or on the memory  
10 card 403 inserted into the data input/output section 3100. However, the image data having meta-data may be stored on the memory card 403 as a first storage medium which stores image data before meta-data attachment or another memory card as a second storage medium.

15 The image data having meta-data may be directly written in the meta-data generation apparatus 4000 through the input terminal of the recording apparatus 3200 or temporarily stored on the memory card 403 or in the storage section 3102 and then written in the meta-data generation  
20 apparatus 4000 through the memory card 403 or storage section 3102.

The meta-data generation apparatus 4000 and data input/output section 3100 can be connected not directly as described above but using a wireless channel. In this case,  
25 a wireless channel interface corresponding to the meta-data generation apparatus 4000 is included in the data

input/output section 3100.

The meta-data may be generated in advance, as described above, or meta-data prepared on a memory card in advance may be used. Fig. 13 is a view showing this example.

5 In this example, for example, a memory card for travel is put on sale, and meta-data for travel which is stored on the memory card in advance is used. A memory card in which meta-data for moving images, meta-data for voice data, and meta-data for still images are prepared in advance in  
10 correspondence with binary data may be used.

As described above, when information that is known about image data is prepared as a meta-data template in advance, and meta-data is repeatedly attached to image data in image sensing, the time required to attach meta-data to  
15 the image data can be shortened. In this embodiment, the meta-data generation apparatus 4000 and the recording apparatus 3200 must easily exchange data. For this purpose, it is suitable to use a detachable recording medium between  
20 the meta-data generation apparatus 4000 and the recording apparatus 3200. Since a general digital camera can mount only one memory card, it is suitable to record both meta-data and image data on a single memory card. When image data is transferred upon embedding meta-data in the image data, the meta-data can always be transferred  
25 together with the image data.

[Third Embodiment (2)]

As a recording apparatus according to the third embodiment (2), a recording apparatus 5200 (see Fig. 23) capable of loading meta-data stored in a storage medium or the like, generating moving image data as binary data, and linking the loaded meta-data to a plurality of generated binary data to generate and output binary data each having meta-data will be described. The meta-data is generated by the above-described meta-data generation apparatus 4000, and the generated meta-data is supplied to the recording apparatus 5200 through a portable storage medium or the like.

[Hardware Configuration of Meta-Data Generation Apparatus and Recording Apparatus]

The third embodiment (2) uses the meta-data generation apparatus 4000 shown in Fig. 19 and the recording apparatus 5200 shown in Fig. 23. The meta-data generation apparatus 4000 for generating meta-data is the same as that described in the third embodiment (1), and a detailed description of its hardware configuration will be omitted.

Referring to Fig. 23, a data input/output section 5100 inputs/outputs data (binary data or meta-data). A memory card 5403 and the structure of a memory card slot as one member of the data input/output section 5100 are the same as those described with reference to Fig. 25, and a detailed description thereof will be omitted.

The recording apparatus 5200 is directly connected to the meta-data generation apparatus 4000 via an input terminal such as a USB terminal, SCSI terminal, or parallel terminal as one member of the data input/output section 5100.

- 5 In the following description, a USB terminal is used as an input terminal. Data (binary data or meta-data) recorded by the meta-data generation apparatus 4000 is directly loaded from the meta-data generation apparatus 4000 to the recording apparatus 5200 through the input terminal, or
- 10 temporarily stored on the memory card 5403 and then loaded to the recording apparatus 5200 through the memory card 5403. Conversely, data processed by the recording apparatus 5200 is directly written in the meta-data generation apparatus 4000 through the input terminal, or temporarily stored on
- 15 the memory card 5403 and then written in the meta-data generation apparatus 4000 through the memory card 5403. Data processed by the recording apparatus 5200 is written in a storage section 5102. The meta-data generation apparatus 4000 and data input/output section 5100 can be
- 20 connected not directly as described above but using a wireless channel. In this case, a wireless channel interface is prepared in the data input/output section 5100.

- An input section 5101 inputs data or instructions
- 25 from the user and is formed from, e.g., operation buttons and the like. The storage section 5102 stores data and is

formed from, e.g., a hard disk. A display section 5103 displays a GUI or image and is constructed by, e.g., a CRT or liquid crystal display.

A CPU 5104 controls the entire recording apparatus  
5 5200. A ROM 5105 and RAM 5106 provide to the CPU 5104 a program, data, and work area necessary for processing by the CPU 5104. Necessary control programs are stored in the storage section 5102 or ROM 5105. When the storage section 5102 stores a control program, it is temporarily loaded to  
10 the RAM 5106 and then executed. A CCD 5108 converts an optical image obtained by image sensing into an electrical signal, thereby generating image data. A tape drive 5107 stores moving image data.

Fig. 24 is a block diagram showing the functional  
15 arrangement using the meta-data generation apparatus 4000 and recording apparatus 5200. The meta-data generation apparatus 4000 comprises a meta-data generation section 5401 and recording section 5402. The meta-data generation section 5401 generates meta-data such as a title and  
20 personal identification information. The recording section 5402 records the meta-data generated by the meta-data generation section on a memory card. The operation of the meta-data generation section is performed under the control of the CPU 5104 which controls the control  
25 program stored in the ROM 5105 using the work area of the RAM 5106. The operation of storing meta-data on the memory



card 5403 by the recording section 5402 is performed through the data input/output section 5100.

The recording apparatus 5200 comprises a reading section 5404, image data generation section 5405, and recording section 5406. The reading section 5404 reads out data stored on the memory card through the data input/output section 4100. The image data generation section 5405 generates RGB image data from an image signal obtained by the CCD 3108 or an image compressed by Motion-JPEG or the like, as needed. The recording section 5406 links image data to meta-data and outputs the data to the tape. The operations of the image data generation section 5405 and recording section 5406 are performed under the control of the CPU 4104 which controls the control program stored in the ROM 4105 using the work area of the RAM 4106.

[Generation and Storage of Meta-Data and Binary Data Having Meta-Data]

Generation and storage of meta-data and binary data having meta-data using the meta-data generation apparatus 4000 and recording apparatus 5200 according to the third embodiment (2) will be described below in detail. To generate binary data having meta-data, a method of embedding the whole meta-data in binary data or a method of embedding only meta-data information (e.g., a file name) in binary data is used. These methods will be sequentially described below.

Assume that various events of an athletic meeting are to be sensed using the recording apparatus 5200. Before image sensing or in preparing for the athletic meeting, the user inserts the memory card 5403 into the meta-data generation apparatus 4000 and records pieces of information known in advance, including the name of event to be sensed, image sensing location, and data and time of image sensing, as a meta-data template.

[Generation and Storage of Meta-Data by Meta-Data  
10 Generation Apparatus]

For example, when pieces of information are known, including the date "1999, July 14", the user name "Taro", the event name "athletic meeting", and the location "athletic park", the meta-data generation apparatus 4000  
15 generates meta-data shown in Fig. 8.

The meta-data input method and meta-data generation method using the meta-data generation apparatus 4000 to obtain the meta-data shown in Fig. 8 are the same as described about the recording apparatus 2200 of the second  
20 embodiment. That is, the contents are the same as those described in detail in paragraphs [Input of Meta-Data] to [Write of Meta-Data in Storage Section or on Memory Card] with reference to Figs. 4 to 7, and a detailed description thereof will be omitted.

25 The generated XML data shown in Fig. 8 is recorded on the root directory of the memory card 5403 with a file

name "CardInfo.xml". When this operation is ended, the user removes the memory card 5403 from the meta-data generation apparatus 4000 and inserts it into the recording apparatus 5200.

5 [Generation Of Image Data and Image Data Having Meta-Data by Recording Apparatus]

At the site of image sensing, i.e., at the athletic meeting, the user senses an image using the recording apparatus 5200. Note that the memory card 5403 which stores  
10 the meta-data generated by the meta-data generation apparatus 4000 is kept inserted into the recording apparatus 5200.

In image sensing, when the user presses the image sensing button of the input section 5101, an image signal  
15 is stored in the CCD 5108, converted into RGB image data, compressed to JPEG data, and recorded on a tape device. At this time, a pointer to "CardInfo.xml" is recorded in the DV format.

When compression is ended, the recording apparatus  
20 5200 reads out the meta-data (CardInfo.xml) from the memory card 5403 through the data input/output section 5100, links the meta-data (CardInfo.xml) to the image data to generate image data having meta-data shown in Fig. 22 or 10B, and writes the generated image data having meta-data on the  
25 memory card 5403 or the like. Thus, image data having meta-data is generated and stored on the memory card 5403

or the like. As described above, even for moving image data, when information known in advance is prepared as a meta-data template and repeatedly attached to the moving image data in image sensing, moving image data having meta-data can be easily generated.

Processing of linking the meta-data to the image data obtained by image sensing to generate image data having meta-data and storing the generated image data having meta-data on the memory card 5403 by the recording apparatus 5200 will be described next in detail with reference to Fig. 26 and Figs. 10A to 12. As the method of generating image data having meta-data using the recording apparatus 5200, 1) the first method of embedding the entire meta-data in moving image data or 2) the second process of attaching only meta-data information to moving image data can be used.

These two methods are the same as those described about the recording apparatus 3200 of the third embodiment (1). That is, the contents are the same as those described in detail in paragraphs [Processing of Linking Meta-Data to A Plurality of Binary Data] to [Processing of Storing Generated Image Data Having Meta-Data] with reference to Figs. 10A to 12 and Fig. 26, and a detailed description thereof will be omitted.

As described above, according to the third embodiment (1) and third embodiment (2), the meta-data generation apparatus 4000 dedicated to generate meta-data is separated

from the recording apparatus 3200 or 5200 for sensing binary data and generating and storing image data having meta-data, thereby further facilitating meta-data generation.

[Other Embodiment]

5           The present invention may be applied to a system constituted by a plurality of devices (e.g., a host computer, an interface device, a reader, a printer, and the like) or an apparatus comprising a single device (e.g., a copying machine, a facsimile apparatus, or the like). The object  
10 of the present invention is realized even by supplying a storage medium (or recording medium) storing software program codes for realizing the functions of the above-described embodiments to a system or apparatus, and causing the computer (or a CPU or an MPU) of the system or  
15 apparatus to read out and execute the program codes stored in the storage medium. In this case, the program codes read out from the storage medium realize the functions of the above-described embodiments by themselves, and the storage medium storing the program codes constitutes the present  
20 invention. The functions of the above-described embodiments are realized not only when the readout program codes are executed by the computer but also when the OS (Operating System) running on the computer performs part or all of actual processing on the basis of the instructions  
25 of the program codes.

The functions of the above-described embodiments are

also realized when the program codes read out from the storage medium are written in the memory of a function expansion board inserted into the computer or a function expansion unit connected to the computer, and the CPU of the function expansion board or function expansion unit performs part or all of actual processing on the basis of the instructions of the program codes.

When the present invention is applied to the storage medium, it stores program codes corresponding to the flow charts described in the above embodiments.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A recording apparatus for attaching, to binary data, meta-data as information related to the binary data, characterized by comprising:

5 meta-data generation means for generating the meta-data;

binary data generation means for generating the binary data to which the meta-data is to be attached; and

meta-data attaching means for attaching the  
10 meta-data to a plurality of binary data generated by said binary data generation means to generate binary data having meta-data.

2. The recording apparatus according to claim 1, characterized by further comprising storage means for  
15 storing the binary data having meta-data outputted by said meta-data attaching means.

3. The recording apparatus according to claim 1, characterized by further comprising binary data having meta-data write means for writing the binary data having  
20 meta-data outputted by said meta-data attaching means in a detachable storage medium or external device.

4. The recording apparatus according to claim 2, characterized by further comprising binary data having meta-data write means for writing the binary data having  
25 meta-data stored in said storage means in a detachable storage medium or external device.

5. The recording apparatus according to claim 1,  
characterized in that

said apparatus further comprises meta-data loading  
means for loading meta-data stored in advance in a  
5 detachable storage medium or external device, and  
said meta-data attaching means attaches the  
meta-data loaded by said meta-data loading means to the  
binary data to generate the binary data having meta-data.

6. The recording apparatus according to claim 1,  
10 characterized in that

said apparatus further comprises binary data loading  
means for loading binary data stored in a first detachable  
storage medium or external device, and

said meta-data attaching means attaches the  
15 meta-data to the binary data loaded by said binary data  
loading means to generate the binary data having meta-data.

7. The recording apparatus according to claim 6,  
characterized by further comprising binary-data having  
meta-data write means for writing the binary data having  
20 meta-data outputed by said meta-data attaching means in the  
first storage medium as a loading source of the binary data.

8. The recording apparatus according to claim 6,  
characterized by further comprising binary-data having  
meta-data write means for writing the binary data having  
25 meta-data stored in said storage means in the first storage  
medium as a loading source of the binary data.



9. The recording apparatus according to claim 1, characterized in that said meta-data attaching means embeds the meta-data to a predetermined position of the binary data.

5 10. The recording apparatus according to claim 1, characterized in that said meta-data attaching means attaches only information representing a file name of the meta-data or a location of the meta-data to a predetermined position of the binary data.

10 11. A recording method of attaching, to binary data, meta-data as information related to the binary data, characterized by comprising:

a meta-data generation step of generating the meta-data;

15 a binary data generation step of generating the binary data to which the meta-data is to be attached; and  
a meta-data attaching step of attaching the same meta-data to a plurality of binary data generated in the binary data generation step to generate binary data having  
20 meta-data.

12. The recording method according to claim 11, characterized by further comprising the storage step of storing the binary data having meta-data outputted by the meta-data attaching step.

25 13. The recording method according to claim 12, characterized by further comprising the binary data having

meta-data write step of writing the binary data having meta-data outputed by the meta-data attaching step in a detachable storage medium or external device.

14. The recording method according to claim 12,  
5 characterized by further comprising the binary data having meta-data write step of writing the binary data having meta-data stored in the storage step in a detachable storage medium or external device.

15. The recording method according to claim 11,  
10 characterized in that  
said recording method further comprises the meta-data loading step of loading meta-data stored in advance in a detachable storage medium or external device, and

15 the meta-data attaching step comprises attaching the meta-data loaded in the meta-data loading step to the binary data to generate the binary data having meta-data.

16. The recording method according to claim 11, further characterized in that

20 the recording method further comprises binary data loading step of loading the binary data stored in a first detachable storage medium or external device, and

the meta-data attaching step comprises attaching the meta-data to the binary data loaded in the binary data  
25 loading step to generate the binary data having meta-data.

17. The recording method according to claim 16,

- characterized by further comprising the binary-data having meta-data write step of writing the binary data having meta-data outputed by the meta-data attaching step in the first detachable storage medium as a loading source of the
- 5 binary data.
18. The recording method according to claim 16, characterized by further comprising the binary-data having meta-data write step of writing the binary data having meta-data stored in the storage step in the first detachable
- 10 storage medium as a loading source of the binary data.
19. The recording method according to claim 11, characterized in that the meta-data attaching step comprises embedding the meta-data to a predetermined position of the binary data.
- 15 20. The recording method according to claim 11, characterized in that the meta-data attaching step comprises attaching only information representing a file name of the meta-data or a location of the meta-data to a predetermined position of the binary data.
- 20 21. A storage medium which stores a processing program for attaching, to binary data, meta-data as information related to the binary data, the processing program comprising:
- a meta-data generation step of generating the
- 25 meta-data;
- a binary data generation step of generating the

binary data to which the meta-data is to be attached; and  
a meta-data attaching step of attaching the same  
meta-data to a plurality of binary data generated in the  
binary data generation step to generate binary data having  
5 meta-data.

22. A recording apparatus for attaching, to binary data,  
meta-data as information related to the binary data,  
characterized by comprising:

meta-data generation means for generating the  
10 meta-data;

binary data loading means for loading the binary data  
to which the meta-data is to be attached from a first  
detachable storage medium or external device; and

meta-data attaching means for attaching the same  
15 meta-data to a plurality of binary data loaded by said  
binary data loading means to generate binary data having  
meta-data.

23. The recording apparatus according to claim 22,  
characterized by further comprising storage means for  
20 storing the binary data having meta-data outputted by said  
meta-data attaching means.

24. The recording apparatus according to claim 22,  
characterized by further comprising binary data having  
meta-data write means for writing the binary data having  
25 meta-data output from said meta-data attaching means in the  
first detachable storage medium or external device as a

loading source of the binary data.

25. The recording apparatus according to claim 22,  
characterized by further comprising binary data having  
meta-data write means for writing the binary data having  
5 meta-data output from said meta-data attaching means in a  
second detachable storage medium or external device  
different from a loading source of the binary data.

26. The recording apparatus according to claim 23,  
characterized by further comprising binary data having  
10 meta-data write means for writing the binary data having  
meta-data stored in said storage means in the first storage  
medium as a loading source of the binary data.

27. The recording apparatus according to claim 23,  
characterized by further comprising binary data having  
15 meta-data write means for writing the binary data having  
meta-data stored in said storage means in a second  
detachable storage medium or external device different from  
a loading source of the binary data.

28. The recording apparatus according to claim 22,  
20 further characterized in that

said recording apparatus further comprises loading  
means for loading meta-data stored, in advance, in a  
detachable storage medium or external device, and

said meta-data attaching means attaches the  
25 meta-data loaded by said meta-data loading means to the  
binary data.

29. The recording apparatus according to claim 22, characterized in that said meta-data attaching means embeds the meta-data to a predetermined position of the binary data.

5 30. The recording apparatus according to claim 22, characterized in that said meta-data attaching means attaches only information representing a file name of the meta-data or a location of the meta-data to a predetermined position of the binary data.

10 31. A recording method of attaching, to binary data, meta-data as information related to the binary data, characterized by comprising:

a meta-data generation step of generating the meta-data;

15 a binary data loading step of loading the binary data to which the meta-data is to be attached from a first detachable storage medium or external device; and

a meta-data attaching step of attaching the same meta-data to a plurality of binary data loaded in the binary data loading step to generate binary data having meta-data.

20 32. The recording method according to claim 31, characterized by further comprising a storage step of storing the binary data having meta-data output in the meta-data attaching step.

25 33. The recording method according to claim 31, characterized by further comprising a binary-data having

meta-data write step of writing a binary data having meta-data outputed by the meta-data attaching step in the first storage medium as a loading source of the binary data.

34. The recording method according to claim 31,  
5 characterized by further comprising the binary-data having meta-data write step of writing the binary data having meta-data outputed by the meta-data attaching step in a second detachable storage medium or external device different from a loading source of the binary data.

10 35. The recording method according to claim 32, characterized by further comprising the binary data having meta-data write step of writing the binary data having meta-data stored in the storage step in the first detachable storage medium as a loading source of the binary data.

15 36. The recording method according to claim 32, characterized by further comprising binary data having meta-data write step of writing the binary data having meta-data stored in the storage step in a second detachable storage medium or external device different from a loading  
20 source of the binary data.

37. The recording method according to claim 31, characterized in that

the recording method further comprises a loading step of loading meta-data stored, in advance, in a detachable  
25 storage medium or external device, and  
the meta-data attaching step comprises attaching the

meta-data loaded in the meta-data loading step to the binary data.

38. The recording method according to claim 31, characterized in that the meta-data attaching step  
5 comprises embedding the meta-data to a predetermined position of the binary data.

39. The recording method according to claim 31, characterized in that the meta-data attaching step  
10 comprises attaching only information representing a file name of the meta-data or a location of the meta-data to a predetermined position of the binary data.

40. A storage medium which stores a processing program for attaching, to binary data, meta-data as information related to the binary data, the processing program  
15 comprising:

a meta-data generation step of generating the meta-data;

a binary data loading step of loading the binary data to which the meta-data is to be attached from a first  
20 detachable storage medium or external device; and

a meta-data attaching step of attaching the same meta-data to a plurality of binary data loaded in the binary data loading step to generate binary data having meta-data.

41. A recording apparatus for attaching, to binary data, meta-data as information related to the binary data, characterized by comprising:



meta-data loading means for loading the meta-data from a first detachable storage medium or external device;

binary data generation means for generating the binary data; and

5 meta-data attaching means for attaching the same meta-data loaded by said meta-data loading means to a plurality of binary data generated by said binary data generation means to generate binary data having meta-data.

42. The recording apparatus according to claim 41,  
10 characterized by further comprising storage means for storing the binary data having meta-data outputted by said meta-data attaching means.

43. The recording apparatus according to claim 41,  
characterized by further comprising binary data having  
15 meta-data write means for writing the binary data having meta-data output from said meta-data attaching means in the first storage medium or external device as a loading source of the meta-data.

44. The recording apparatus according to claim 41,  
20 characterized by further comprising binary data having meta-data write means for writing the binary data having meta-data outputted by said meta-data attaching means in a second detachable storage medium or external device different from a loading source of the binary data.

25 45. The recording apparatus according to claim 41, characterized by further comprising binary-data having

meta-data write means for writing the binary data having meta-data stored in said storage means in the first detachable storage medium as a loading source of the meta-data.

5 46. The recording apparatus according to claim 41, characterized by further comprising binary data having meta-data write means for writing the binary data having meta-data stored in said storage means in a second detachable storage medium or external device different from  
10 a loading source of the meta-data.

47. The recording apparatus according to claim 41, characterized in that

said apparatus further comprises binary data loading means for loading binary data stored in advance in a  
15 detachable storage medium or external device, and

said meta-data attaching means attaches the meta-data loaded by said meta-data loading means to the binary data to generate the binary data having meta-data.

48. The recording apparatus according to claim 41, characterized in that said meta-data attaching means embeds  
20 the meta-data to a predetermined position of the binary data.

49. The recording apparatus according to claim 41, characterized in that said meta-data attaching means  
25 attaches only information representing a file name of the meta-data or a location of the meta-data to a predetermined

position of the binary data.

50. A recording method of attaching, to binary data, meta-data as information related to the binary data, characterized by comprising:

5       a meta-data loading step of loading the meta-data from a first detachable storage medium or external device;

          a binary data loading step of loading the binary data from the first detachable storage medium or external device; and

10       a meta-data attaching step of attaching the same meta-data loaded in the meta-data loading step to a plurality of binary data loaded in the binary data loading step to generate binary data having meta-data.

51. The recording method according to claim 50,  
15       characterized by further comprising the storage step of storing the binary data having meta-data outputted by the meta-data attaching step.

52. The recording method according to claim 50,  
20       characterized by further comprising the binary data having meta-data write step of writing the binary data having meta-data outputted by the meta-data attaching step in the first storage medium or external device as a loading source of the binary data.

53. The recording method according to claim 50,  
25       characterized by further comprising the binary data having meta-data write step of writing the binary data having

meta-data outputed by the meta-data attaching step in a second detachable storage medium or external device different from a loading source of the binary data.

54. The recording method according to claim 50, characterized by further comprising the binary data having meta-data write step of writing the binary data having meta-data stored in the storage step in the first storage medium as a loading source of the binary data.

55. The recording method according to claim 50, characterized by further comprising the binary data having meta-data write step of writing the binary data having meta-data stored in the storage step in a second detachable storage medium or external device different from a loading source of the binary data.

56. The recording method according to claim 50, characterized in that

said method further comprises the binary data loading step of loading binary data stored, in advance, in a detachable storage medium or external device, and

the meta-data attaching step comprises attaching the meta-data loaded in the meta-data loading step to the binary data to generate the binary data having meta-data.

57. The recording method according to claim 50, characterized in that the meta-data attaching step comprises embedding the meta-data to a predetermined position of the binary data.

58. The recording method according to claim 50, characterized in that the meta-data attaching step comprises attaching only information representing a file name of the meta-data or a location of the meta-data to a predetermined position of the binary data.

59. A storage medium which stores a processing program for attaching, to binary data, meta-data as information related to the binary data, the processing program comprising:

10 a meta-data loading step of loading the meta-data from a first detachable storage medium or external device;

a binary data loading step of loading the binary data from the first detachable storage medium or external device; and

15 a meta-data attaching step of attaching the same meta-data loaded in the meta-data loading step to a plurality of binary data loaded in the binary data loading step to generate binary data having meta-data.

## ABSTRACT OF THE DISCLOSURE


Various recording apparatuses and methods, each capable of repeatedly attaching the same meta-data as  
5 information related to binary data to a plurality of binary data to generate a plurality of binary data having meta-data.


A first recording apparatus generates binary data by image sensing and also generate meta-data as information related  
10 to the binary data. This apparatus can repeatedly attach the same meta-data generated to the generated binary data to easily generate a plurality of binary data having meta-data.

A second recording apparatus loads and uses binary data  
15 instead of generating it and can generate meta-data and repeatedly attach the same meta-data to a plurality of loaded binary data to easily generate binary data having meta-data.


A third recording apparatus can generate the meta-data  
20 using a dedicated meta-data generation apparatus, store the meta-data in a storage medium, and load and use the meta-data from the storage medium, and also generate binary data and repeatedly attach the same meta-data loaded to generated binary data to easily generate a plurality of  
25 binary data having meta-data.

FIG. 1

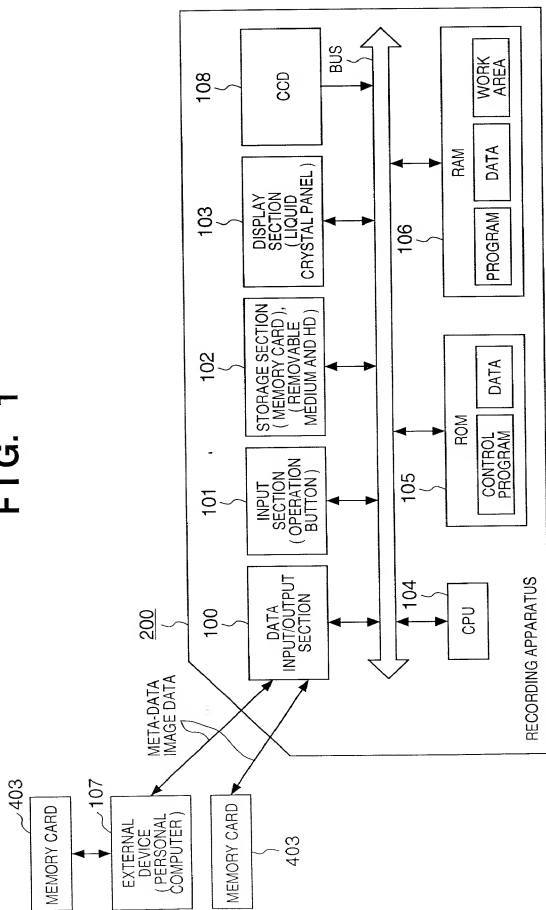

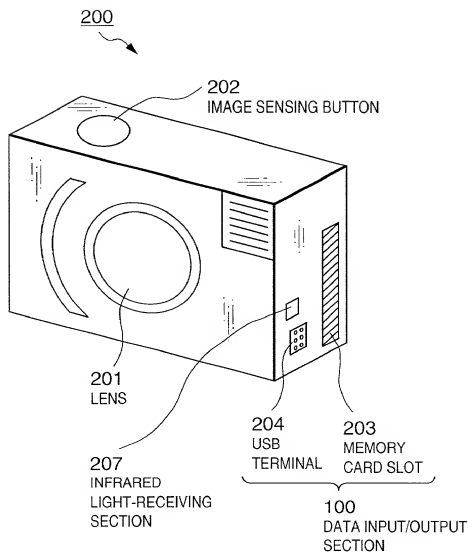**FIG. 2A**

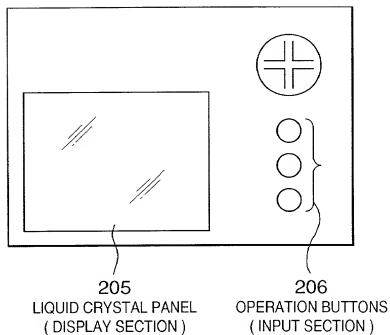

**FIG. 2B**

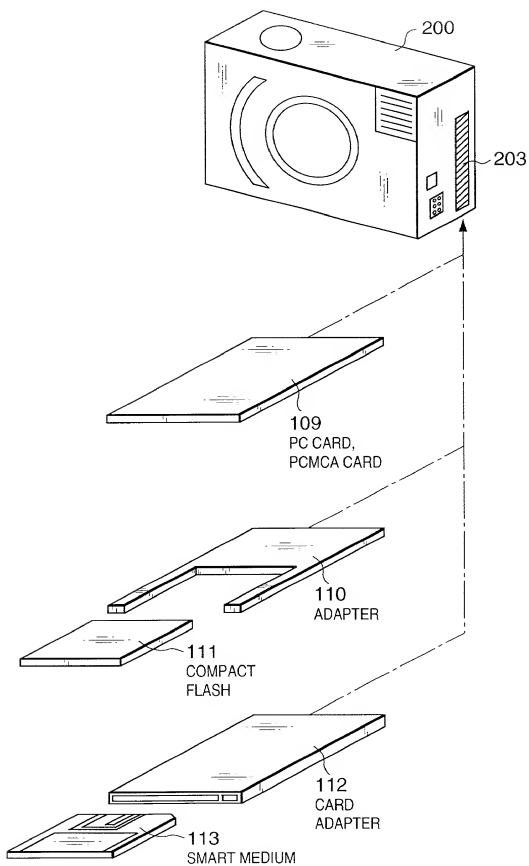
**FIG. 3**

FIG. 4

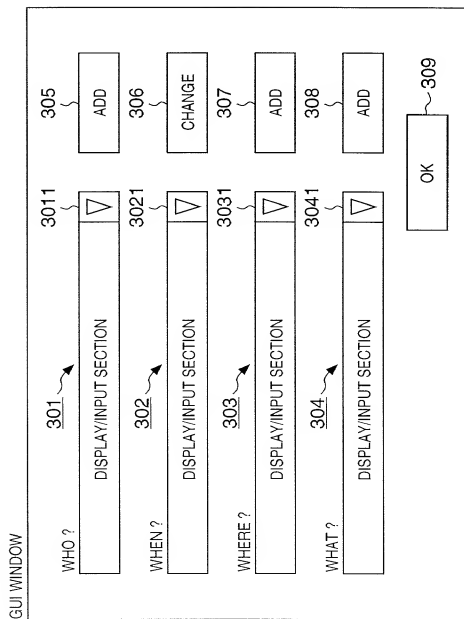


FIG. 5


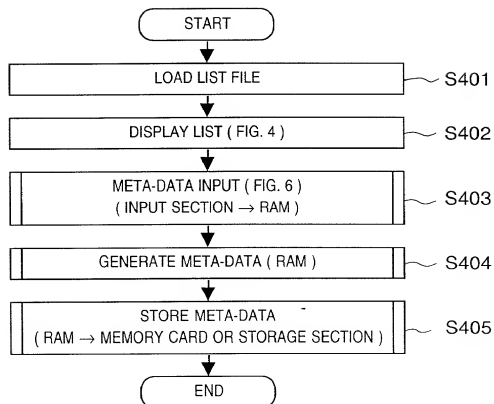


FIG. 6

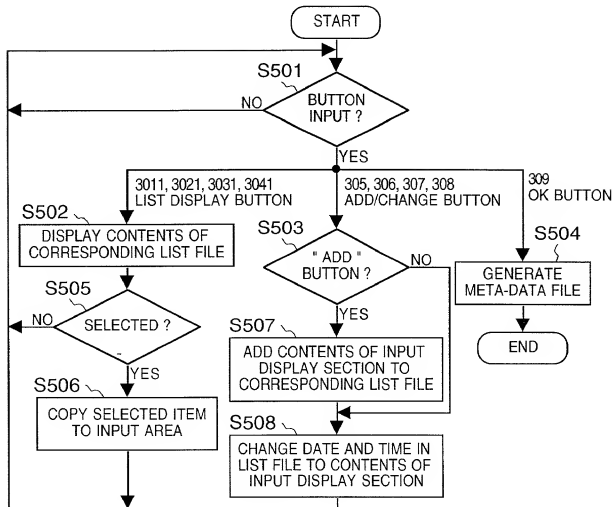

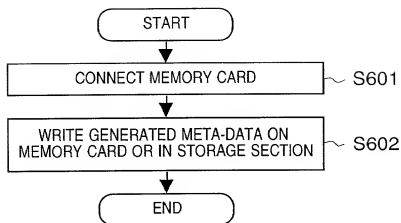
**FIG. 7**

FIG. 7

FIG. 8


META-DATA FILE ( CardInfo. xml )

< ? xml version = "1.0" encoding = "Shift\_JIS" ? >



< Photo >

< ITEM ATTR = 'Photographer' > Taro </ITEM >  
 < ITEM ATTR = 'Data' > 1999-06-14 </ITEM >  
 < ITEM ATTR = 'Event' > ATHLETIC MEETING </ITEM >  
 < ITEM ATTR = 'Location' > ATHLETIC PARK </ITEM >  
 < /Photo >


FIG. 9

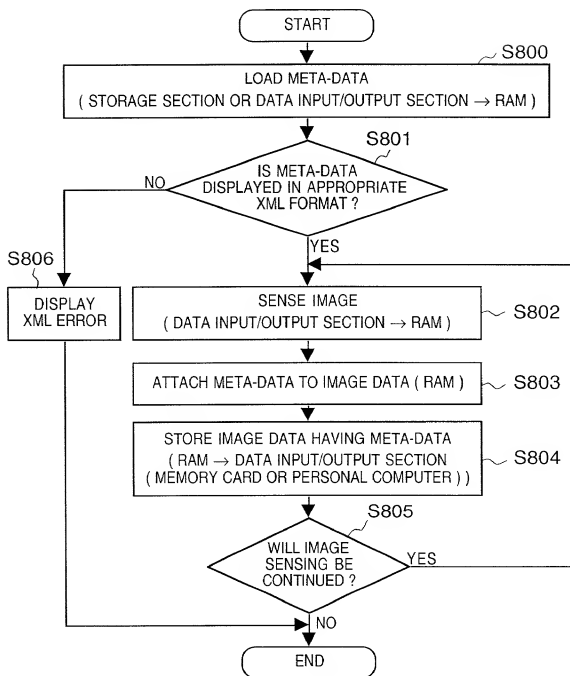

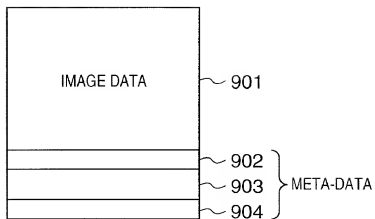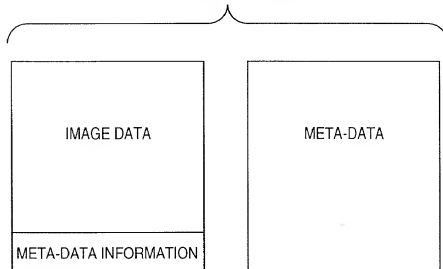

**FIG. 10A****FIG. 10B**

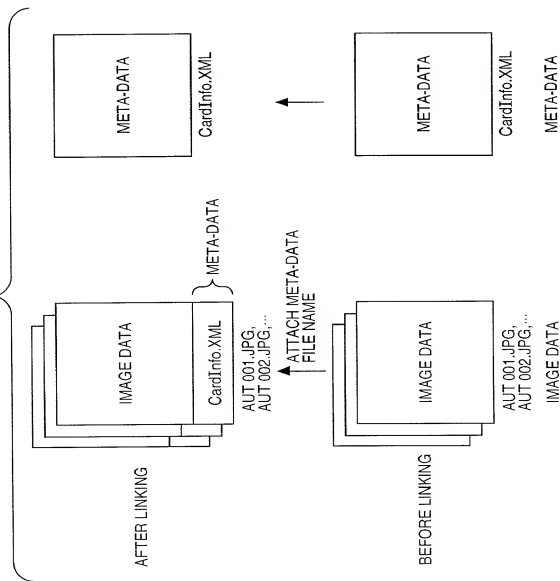

**FIG. 12**



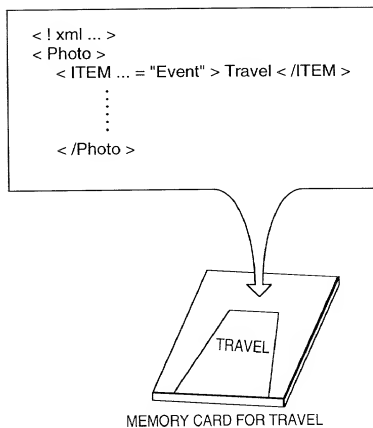
**FIG. 13**

FIG. 14

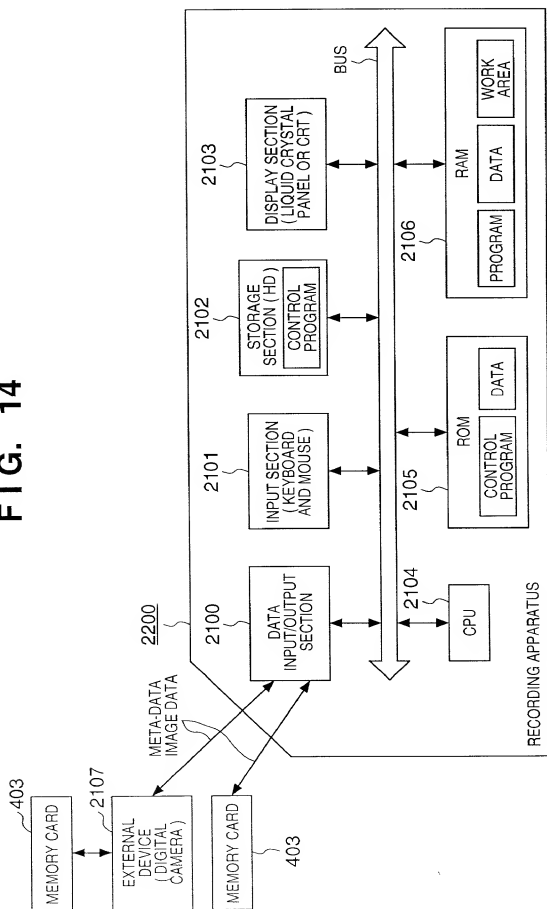

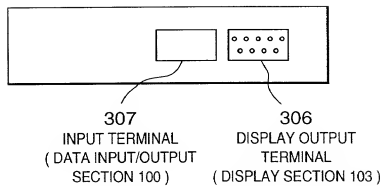

**FIG. 15B**

100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

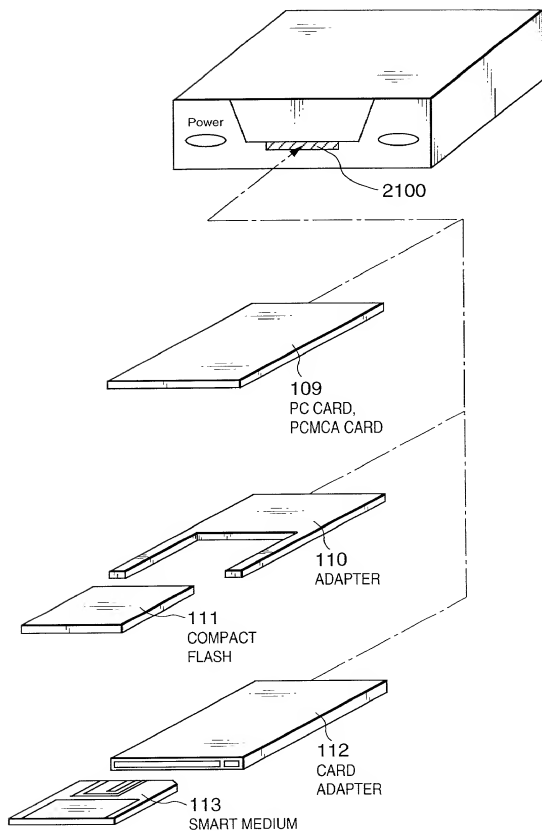
**FIG. 16**



FIG. 17

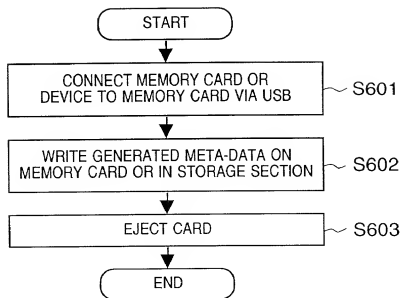


FIG. 17

FIG. 18

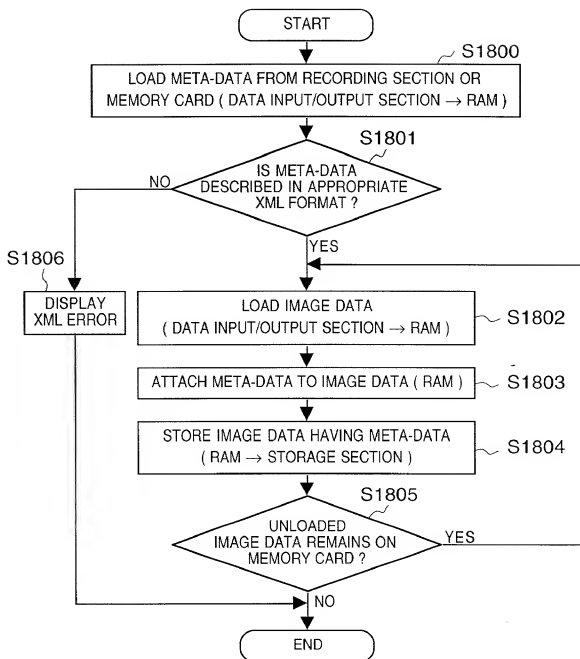
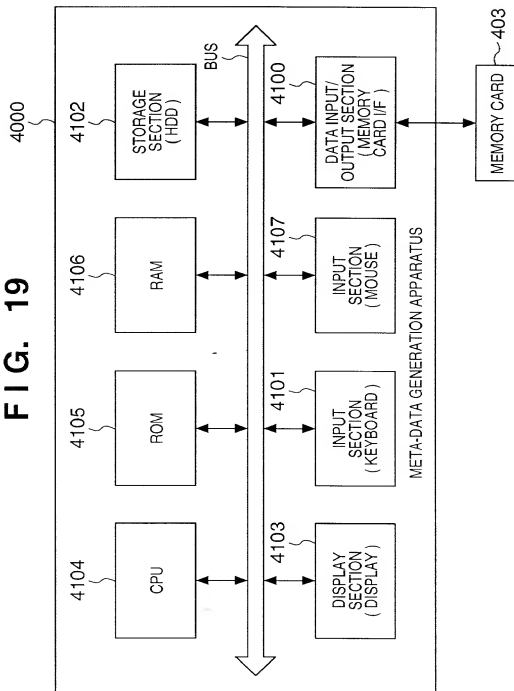


FIG. 19





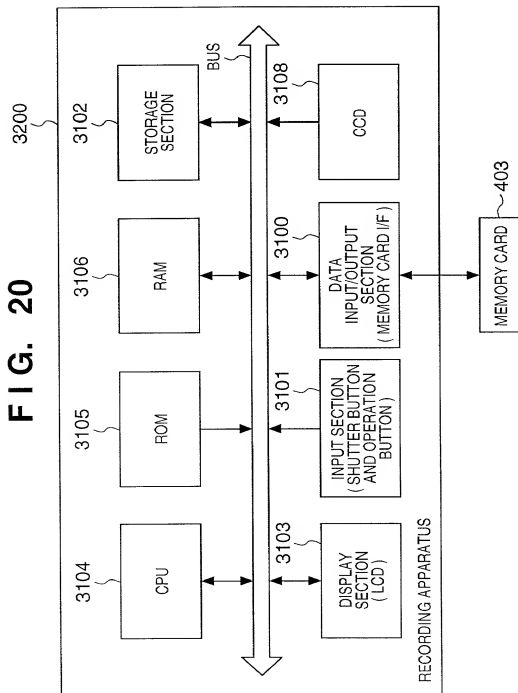


FIG. 21

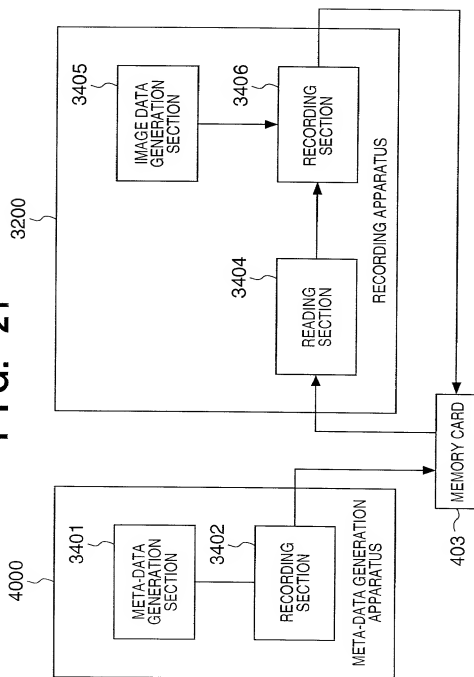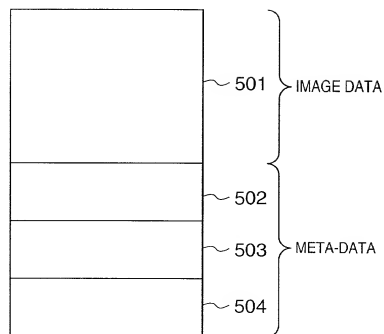

**FIG. 22**

**FIG. 23**

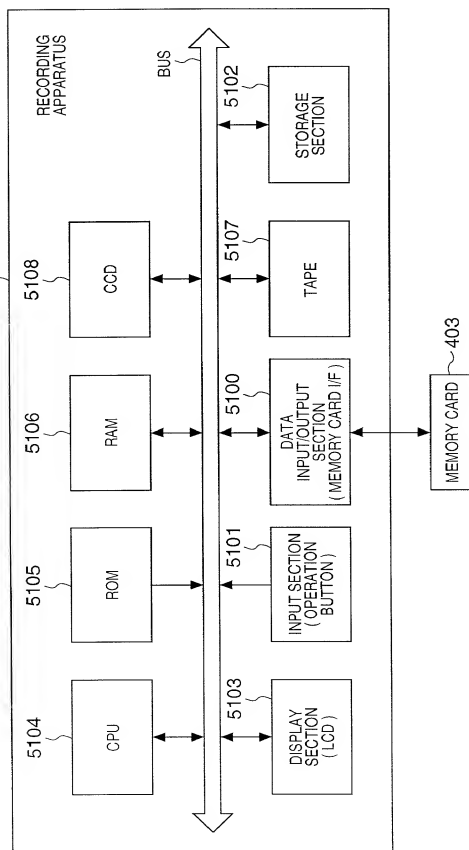


FIG. 24



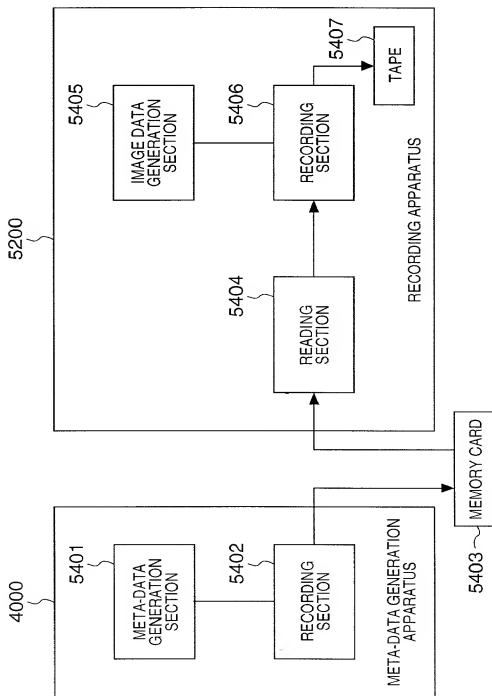





FIG. 25

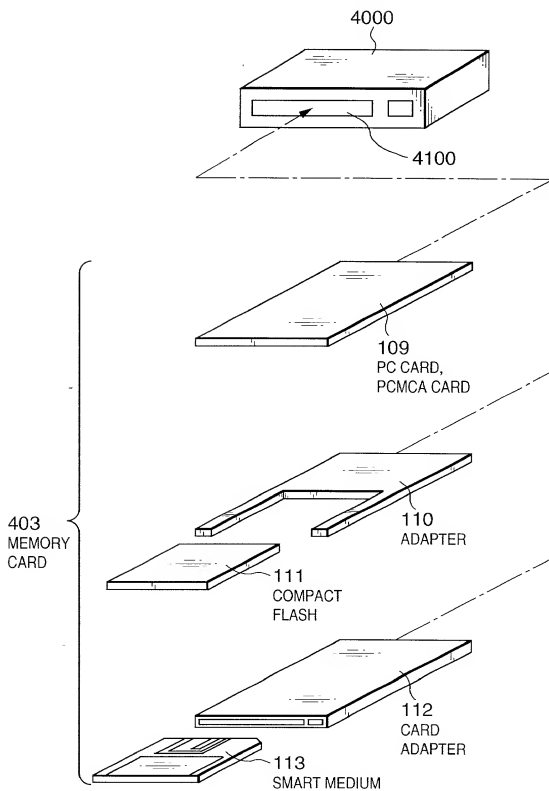


**FIG. 26**

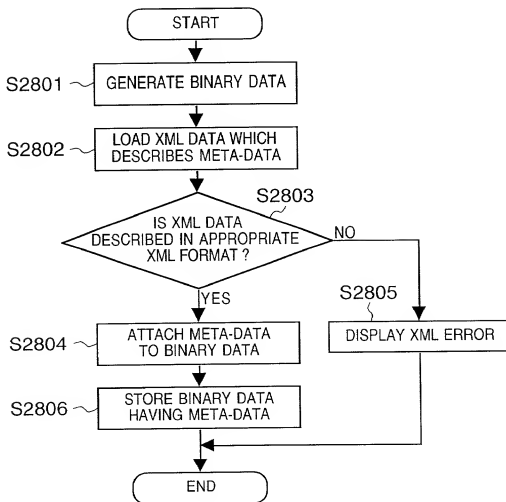

**FIG. 27B**

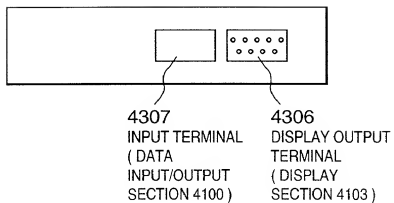

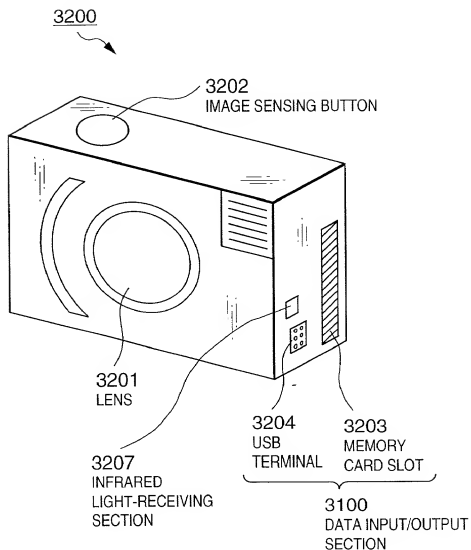**FIG. 28A**

**FIG. 28B**

